




STELLARIS™

A SINGLE
LUMINAIRE.
TASK OR
AMBIENT.
TUNABLE,
WARM DIM, OR
STATIC WHITE.

A sculptural form offers a refined visual statement—engineered to complement diverse design sensibilities while delivering dynamic, customizable illumination.

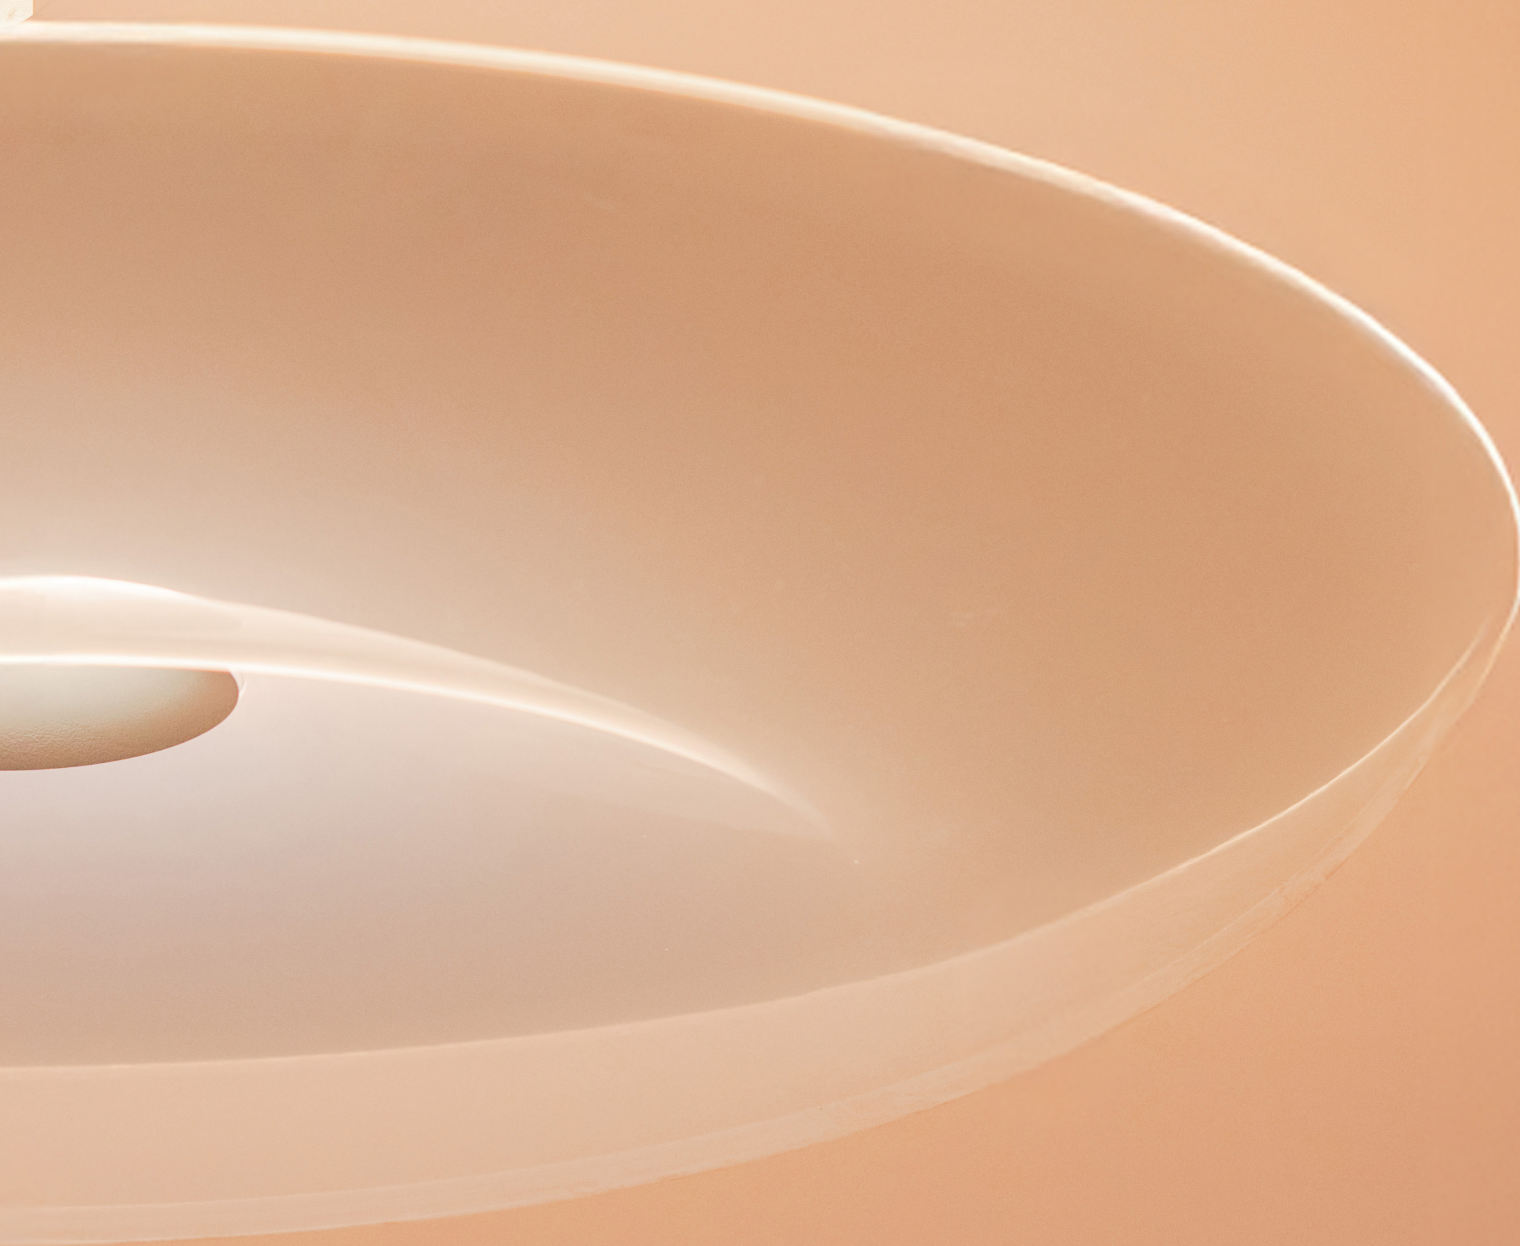



NO LIMITS. JUST LIGHT.

STELLARIS™ is a striking luminaire featuring three independently controlled light sources—a downlight, an uplight, and a waveguide whose seamless fold conceals the light source, creating a mesmerizing effect of floating illumination.



DIFFUSE

A volumetric waveguide offers a glow up to 3905 lumens.

ENHANCE YOUR ENVIRONMENT.

DIRECTIONAL

A central downlight on specific objects or locations up to 4521 lumens.



A SOLUTION FOR EVERY CEILING.


Whether you need ceiling mount, ceiling junction mount, or zero sightline. Available in Surface mount or Stem mount.



INSTALLATION OPTIONS


SURFACE AND STEM MOUNT

- Ceiling 'J' Mount (A)
- Mounts to standard 4" junction box.
- Ceiling Mount Junction Box (B)
- Matches fixture canopy for a sleek minimalistic appearance.
 - Accepts ½" and ¾" EMT conduit.

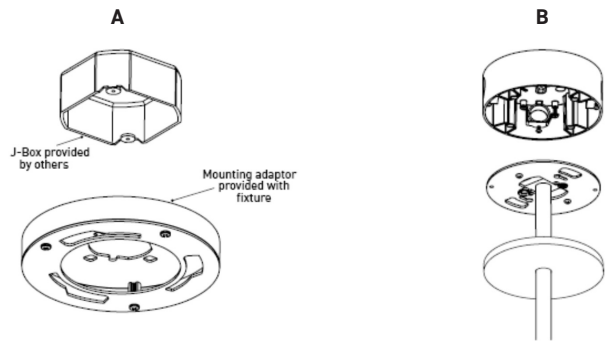


STEM MOUNT

- Zero-Sightline (C)
- Canopy mounts flush with minimalistic transition to ceiling.
 - Mounts to standard 4" junction box.
 - Stem is available in field cuttable lengths up to 172".

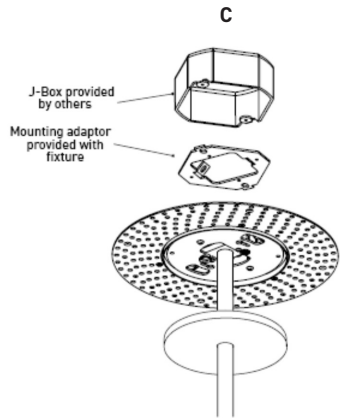


AVAILABLE COLOR TEMPERATURES AND SPECTRUMS

- TUNABLE WHITE (90+ CRI)**
- Cool Profile — 5000K to 2700K
 - Warm Profile — 4000K to 1800K
- STATIC WHITE (90+ CRI)**
- 2700K
 - 3000K
 - 3500K

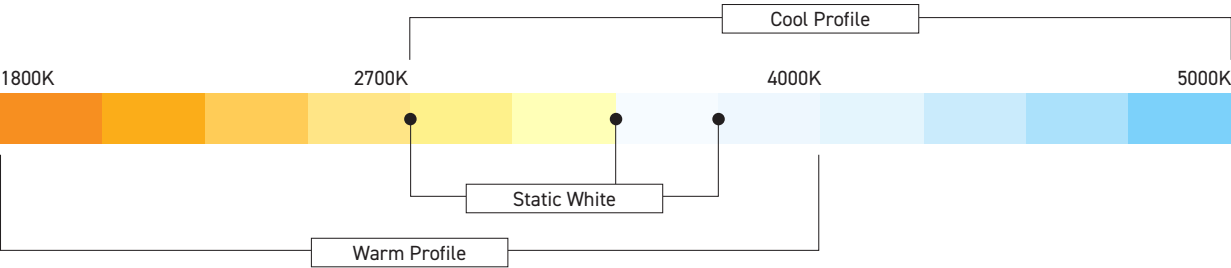

- WARM DIM (90+ CRI)**
- Halogen Warm-Dim Profile — 3000K to 1800K
 - Incandescent Warm-Dim Profile — 2700K to 1800K

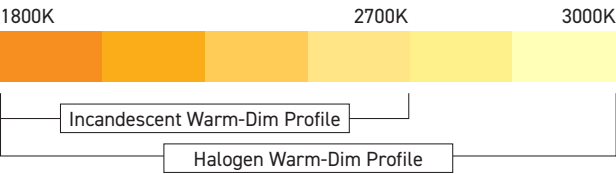




THREE SOURCES: DOWNLIGHT, WAVEGUIDE, UPLIGHT.
TWO MODALITIES: TASK AND AMBIENT.
ONE FIXTURE.


DOWNLIGHT

LUMEN PACKAGE	WATTAGE	10° OPTIC / SFL		15° OPTIC / NO LENS		20° OPTIC / NO LENS		25° OPTIC / NO LENS		40° OPTIC / NO LENS		60° OPTIC / NO LENS		85° OPTIC / WDL	
		DELIVERED	LPW	DELIVERED	LPW	DELIVERED	LPW	DELIVERED	LPW	DELIVERED	LPW	DELIVERED	LPW	DELIVERED	LPW
9N2	17	707	32	-	-	-	-	-	-	-	-	-	-	-	-
9L2	38	-	-	3602	95	3663	96	3688	97	3524	93	3419	90	2906	76
9M2	50	-	-	4415	88	4491	90	4521	90	4320	86	4192	84	3563	71
9WL (2700K-1800K)	50	-	-	3967	79	4036	81	4062	81	3882	78	3767	75	3202	64
9WD (3000K-1800K)	50	-	-	4141	83	4213	84	4240	85	4052	81	3932	79	3342	67
9TH (4000K-1800K)	40	-	-	3189	80	3244	81	3265	82	3120	78	3028	76	2573	64
9TR (5000K-2700K)	40	-	-	3456	86	3516	88	3539	88	3382	85	3281	82	2789	70

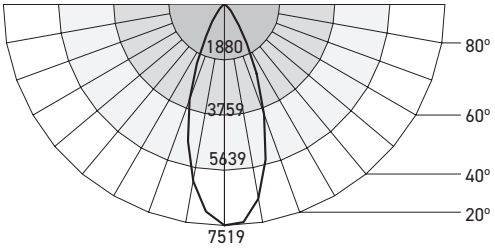


WAVEGUIDE

LUMEN PACKAGE	WATTAGE	2700K		3000K		3500K	
		DELIVERED	LPW	DELIVERED	LPW	DELIVERED	LPW
9M	50	2357	47	2563	51	2517	50
9H	85	3591	42	3905	46	3915	46
9WL (2700K-1800K)	50	2461	49	-	-	-	-
9WD (3000K-1800K)	50	-	-	2189	44	-	-
9TH (4000K-1800K)	40	-	-	1771	44	-	-
9TR (5000K-2700K)	40	-	-	1760	44	-	-

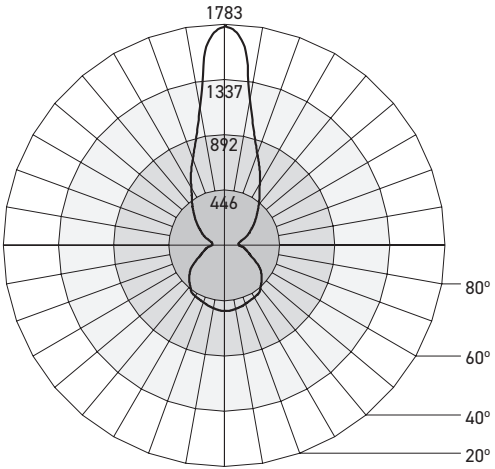

UPLIGHT

LUMEN PACKAGE	WATTAGE	2700K		3000K		3500K	
		DELIVERED	LPW	DELIVERED	LPW	DELIVERED	LPW
M	5	374	75	369	74	382	76
H	10	573	57	566	57	586	59
WL (2700K-1800K)	5	374	75	-	-	-	-
WD (3000K-1800K)	5	-	-	354	71	-	-
TH (4000K-1800K)	5	-	-	440	88	-	-
TR (5000K-2700K)	5	-	-	429	86	-	-

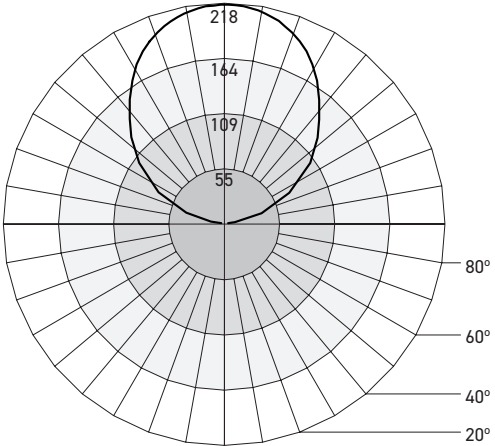

SERIES	INTERIOR BODY FINISH	EXTERIOR FINISH	LUMEN PACKAGE	CCT	OPTIC	EFFECTS DEVICE	DRIVER	MOUNTING	
S STELLARIS	WH White Powdercoat	WH White Powdercoat	STATIC WHITE 9M, 90+ CRI (Downlight Delivered Lumens - 4521) (Waveguide Delivered Lumens - 3905) (Uplight Delivered Lumens - 566) WARM DIM 90W, 90+ CRI (Downlight Delivered Lumens - 4062) (Waveguide Delivered Lumens - 2461) (Uplight Delivered Lumens - 374) TUNABLE WHITE 9T, 90+ CRI, 40W (Downlight Delivered Lumens - 3265) (Waveguide Delivered Lumens - 1771) (Uplight Delivered Lumens - 440)	27 2700K 30 3000K 35 3500K	1 10° 2 15° 3 20° 4 25° 5 40° 6 60° 8 85°	STANDARD EFFECTS DEVICE 0 No lens OPTIONAL EFFECTS DEVICE 1 Honeycomb Louver 3 Frosted Glass Lens 4 Soft Focus Lens 5 Frosted Soft Focus Lens 6 Frosted Linea Spread Lens 7 Wide Distribution Lens N No Lens	INTEGRAL OR REMOTE 120V-277V SG3 1% 0-10V, LOG SN3 1% 0-10V, LIN EG1 eldoLED, SOLOdrive, 0.1% 0-10V, LOG EN1 eldoLED, SOLOdrive, 0.1% 0-10V, LIN ED1 eldoLED, SOLOdrive, 0.1% DALI-2 DT6, LOG REMOTE 120V-277V AS1 Athena Control eldoLED, SOLOdrive 0.1% CS1 Casambi Control eldoLED, SOLOdrive 0.1% TUNABLE WHITE REMOTE 120V-277V DG1 eldoLED, DUALdrive 0.1% 0-10V, LOG DN1 eldoLED, DUALdrive 0.1% 0-10V, LIN DD2 eldoLED, DUALdrive 0.1% DALI-2 DT8, LOG TUNABLE WHITE REMOTE 120V-277V AD1 Athena Control eldoLED, SOLOdrive 0.1% CD1 Casambi Control eldoLED, SOLOdrive 0.1%	J Standard, J-Box Surface Mounting Plate C 1/2" and 3/4" Conduit Ceiling Mount Junction Box* *(Finish specified in canopy color section) Z Zero-Sightline, J-Box Surface Mounting	
	BK Black Powdercoat	BK Black Powdercoat							
SIZE	AG Satin Silver Powdercoat	AG Satin Silver Powdercoat							
4 31"	AU Cashmere Gold Powdercoat	AU Cashmere Gold Powdercoat							
FIXTURE TYPE	BB Burnt Bronze Powdercoat	BB Burnt Bronze4							
C Surface Mount D Stem Mount	CF Custom Finish* *(Consult Factory)	CF Custom Finish* *(Consult Factory)		D 3000K-1800K L 2700K-1800K					

SPECIFICATIONS	DOWNLIGHT	WAVEGUIDE	UPLIGHT	ALL SOURCES
LIGHT SOURCE	LED COB	LED	LED	Combo
DELIVERED LUMEN 3000K, 90CRI	4521lm	3905lm	566lm	4521lm / 3905l / 566lm
WATTAGE	50W	85W	10W	140W
LIGHT DISTRIBUTION	Direct	Omni-directional	Direct	
CRI	90+ CRI			
CCT	2700K, 3000K, 3500K, Warm Dim and Tunable White			
STRUCTURE	Extruded, die cast, spun aluminum, polycarbonate, Nylon, and PMMA polymers			
COLORS	White, Black, Silver, Gold, and Bronze			
VOLTAGE	120-277VAC			
DIMMING	0-10V dimming, Athena Wireless and Casambi Wireless, DALI-2			
SIZE	Large 31"			
WARRANTY	1 year- Workmanship, 5 year- LED and Power supply			

