FRAXION[®]3 INTERNATIONAL DEEP REGRESS Max output of 1548lm at 80+ CRI

Deep regress baffle options in round and square featuring UGR as low as 1

Now available for remodel and concrete pour applications

ORDERING INFORMATION - DOWNLIGHT FITTING

BAFFLE INSTALL CEILING SHAPE RATING TYPE FINISH CRI WATTAGE CCT OPTIC (UGR) MEDIA DRIVER FINISH TYPE THICKNESS 1 **10** 10°* (<10) **STANDARD MEDIA** 1 6mm-54mm PH1 F3RD POWDERCOAT 24 2400K* Forward / Reverse Round IP20 Adjust-able STATIC EX Export Δ STATIC WHITE POWDERCOAT MICROFLANGE * (90+ CRI 11D, 15D, * (09H package Deep Phase, 2%, 120V* Dry/Damp 04 Soft Focus CONCRETE Regress and 09H only only) 06D 06W - 524 Lm (120V, For use in Mexico only) F Fixed WH White 805 80+ wн 2 IP64 Wet* White POUR Lens' 27 2700K 15 15° <13 Square Deep F3SD * (Suction cup provided for aim and focus) eldoLED, SOLOdrive 0.1% KC Integral Driver IG1 AB Architectural 905 90+ 25 35 * (Required for 10° AB Architectural 09H 09W - 363 Lm* 30 3000K 25° (<13) [<16] Optic) 0-10V, LOG, 120V-277V Bronze Bronze * (For use with 10° optic only) 35 3500K 35° Regress **95S** 95+ KR Remote IN1 eldoLED. SOLOdrive 0.1% 50 AG AG Satin Silver 11D 11W-842 Lm 40 4000K 50° [<19] ALTERNATE MEDIA Satin Silver F3TD Square Driver 80 0-10V. LIN. 120V-277V 80°* (>19) Transitional AU AU 15D 15W - 1138 Lm Cashmere Cashmere 01 Honeycomb Deep * (Requires -07 WDL) Gold Gold ID1 eldoLED, SOLOdrive 0.1% 19D 19W - 1537 Lm Louver* Regress* edial DALI-2, LOG, 120V-277V BB Burnt Bronze BB Burnt Bronze Not available for IP64 (Not available for Wet Location, or Adjustable Fixtures) atural wood baffles TUNABLE WHITE BK Black BK Black MD2 0.1% DALI-2 DT8, LOG PR Primer PR Primer 02 Clear Glass 120V-277V CF Custom Finish* CF Custom Lens WARM DIM **15** 15°* (<13) Finish' WARM DIM Frosted Glass 03 (Consult Factory (Consult Factory) * (Not available with 90L 90+ 11D 90+ CRI. 11 Watts Lens 01, 02, or NL media) TRIMLESS NATURAL (<13)**|05** 25 WOOD 25° Frosted Soft 15D 90+ CRI, 16 Watts TG Trimless 35 35° (<16) WL 2700K Focus Lens WO Customer Incandescent Profile Gypsum 50 50° (<19) 11D - 711 Lm 15D - 744 Lm 1800K Supplied 1.5mm* • (Not available for 06 Frosted Linear 80°* (>19) 80 Dried Spread Lens Hardwood* (Not available for * (Requires -07 WDL media) concrete pour HalogenProfile WD 3000K -1800K , stallations 07 Wide 11D - 909 Lm 15D - 935 Lm P64 wet locations) TM Trimless Distribution Millwork* W1 Lucifer Lens* SEE PAGE 4 FOR DETAILED WARM DIM PROFILE COMPARISON. (Not available for Lighting * (Required and only available for 85° optic) concrete pour Walnut* * (Not available for HS Adjustable P64 wet locations) TUNABLE WHITE TUNABLE WHITE TR 4000K -15 15° (<13) Honeycomb 25° 35° W2 Lucifer 25 35 50 1800K (<13) Louver and Lighting 90T 90+ 10D 10W 5000K 2700K (<16) ΤH Soft Focus White Oak^{*} (Not available for 50° (<19) Lens * Warm Profile: 4000K - 1800K 80 80°* [>19] (Not available for IP64 IP64 wet locations) 746 Lm Wet Location, 21W, or * (Requires -07 WDL Cool Profile: 5000K - 2700K 657 Lm edia Fixed Fixtures) NL No Lens * * (Not available for IP64 Wet Location) (WH) (AR) (AG) White Architectural Bronze Satin Silver Powder Coat Powder Coat Powder Coat (RR) (AU) (BK) LUMEN DELIVERED OUTPUTS Cashmere Gold Burnt Bronze Black REFLECT 80+ CRI / 3000K PAIRED Powder Coat Powder Coat Powder Coat WITH 50° OPTIC AND SOFT FOCUS LENS (W1) (W2) Lucifer Lighting Lucifer Lighting Red List Approved e Walnut White Oak



© 2025 Lucifer Lighting Company

luciferlighting.com

As part of its policy of continuous research and product development, the company reserves the right to change or withdraw specifications without prior notice.

[PH] +1-210-227-7329 pg. 1 [FAX] +1-210-227-4967

PROJECT NAME:

TYPE:

ACCESSORIES

ROUND / SQUARE TRANSITIONAL ALTERNATE MEDIA

IP20 Dry / Damp location only.						
IP64 Wet location requires alternate baffle.						
HCL-F3RD Honeycomb Louver*						
* (Not available for warm (dim when paired with 15° optic)					
	Clear Glass Lens*					
* (Not available for warm (dim when paired with 15° optic)					
🗆 FGL-F3RD	Frosted Glass Lens					
SFL-F3RD	Soft Focus Lens					
FSFL-F3RD	Frosted Soft Focus Lens					
🗆 WDL-F3RD	Wide Distribution Lens*					
* (Required and only available for 80° beam spread)						
FLSL-F3RD	Frosted Linear Spread Lens					

REPLACEMENT BAFFLE ASSEMBLY (INCLUDES MEDIA)

SQUARE ALTERNATE MEDIA

IP20 Dry / Damp location only.						
IP64 Wet location re	IP64 Wet location requires alternate baffle.					
HCL-F3SD Honeycomb Louver*						
* (Not available for warm d	im when paired with 15° optic)					
CGL-F3SD	Clear Glass Lens*					
* (Not available for warm d	* (Not available for warm dim when paired with 15° optic)					
🗆 FGL-F3SD	Frosted Glass Lens					
🗆 SFL-F3SD	Soft Focus Lens					
FSFL-F3SD	Frosted Soft Focus Lens					
□ WDL-F3SD Wide Distribution Lens*						
* (Required and only available for 80° beam spread)						
🗆 FLSL-F3SD	Frosted Linear Spread Lens					

ADJUSTABLE HCL ASSEMBLY

Dry / Damp location only.

□ OLR-F3RD1-SFL-HCL

Adjustable Honeycomb Louver and Soft Focus Lens* * (Not available for IP64 Wet Location, 19W, or Fixed Fixtures)

ASSEMBLY	SHAPE	RATING	FINISH	MEDIA
RBA	-		-	-
REPLACEMENT BAFFLE ASSEMBLY	F3RD Round Deep Regress F3SD Square Deep Regress F3TD Square Transitional Deep Regress	1 IP20 Dry/Damp 2 IP64 Wet* * (Requires provided suction cup to service or aim & focus)	WH White AB Architectural Bronze AG Satin Silver AU Cashmere Gold BB Burnt Bronze BK Black PR Primer CF Custom Finish* *(Consult Factory)	LEAVE BLANK FOR SOFT FOCUS LENS (SFL) HCL Honeycomb Louver* * (Not available for IP64 Wet Location, adjustable fixtures, or warm dim when using 15° optic] CGL Clear Glass Lens* * (Not available for warm dim when using 15° optic) FGL Frosted Glass Lens FSFL Frosted Glass Lens FLSL Frosted Linear Spread Lens WDL Wide Distribution Lens* * (Required and only available for 80° optic) NL No Lens* * (Not available for IP64 Wet Location, or warm dim when using 15° optic)

DEEP REGRESS REPLACEMENT OPTICS

Interchangeable optics accessible through fixture aperture.

STATIC W	HITE	WARM DIM	TUNABLE WHITE
□ R0-35-15-S □ R0-35-25-S □ R0-35-35-S □ R0-35-50-S	25° optic 35° optic	□ R0-35-15-W 15° optic □ R0-35-25-W 25° optic □ R0-35-35-W 35° optic □ R0-35-50-W 50° optic	□ R0-35-25-T 25° optic □ R0-35-35-T 35° optic

REPLACEMENT SUCTION TOOL

One included with every six fixtures designated Wet location.

F4-TOOL-SUCTION Allows for removal of baffle with Wet location



) 🖲 🕞 PERFORMANCE - 3000K

LUMEN	WATT-	10° C FIELD REI	PTIC DUCER KIT		PTIC CUS LENS	25° C SOFT FOO			IPTIC CUS LENS	50° C SOFT FOO	PTIC CUS LENS	80° C SOFT FOO	IPTIC
PACKAGE	AGE	DLVD	LPW	DLVD	LPW	DLVD	LPW	DLVD	LPW	DLVD	LPW	DLVD	LPW
80S06D	06	-	-	527	88	524	87	477	80	500	83	430	72
80S09H	09	363	33	-	-	-	-	-	-	-	-	-	-
80S11D	11	-	-	848	77	842	77	768	70	805	73	692	63
80S15D	15	-	-	1129	75	1138	76	1038	69	1087	72	935	62
80S19D	19	-	-	1548	74	1537	73	1401	67	1468	70	1263	60
90S06D	06	-	-	446	74	443	74	404	67	423	71	364	61
90S09H	09	312	35	-	-	-	-	-	-	-	-	-	-
90S11D	11	-	-	718	65	713	65	650	59	681	62	585	53
90S15D	15	-	-	970	65	963	64	878	59	920	61	791	63
90S19D	19	-	-	1310	62	1300	62	1185	56	1242	59	1068	51
95S06D	06	-	-	396	66	393	66	358	60	375	63	323	54
95S09H	09	269	18	-	-	-	-	-	-	-	-	-	-
95S11D	11	-	-	637	58	632	57	576	52	604	55	519	47
95S15D	15	-	-	861	57	854	57	779	52	816	54	702	47
95S19D	19	-	-	1162	55	1153	55	1052	50	1102	52	948	45
90W11D (26K-18K)	11	-	-	698	63	711	65	644	59	665	60	538	49
90W11D (29K-18K)	11	-	-	747	68	744	68	674	61	706	64	566	51
90W15D (27K-18K)	15	-	-	912	61	909	61	811	54	857	57	685	46
90W15D (30K-18K)	15	-	-	975	65	935	62	989	66	888	59	935	62
90T10D (50K-27K)	10	-	-	662	66	657	66	586	59	623	62	674	67
90T10D (40K-18K)	10	-	-	752	75	746	75	667	67	708	71	766	77



75+ LPW configurations comply with residential Part L

95+ LPW configurations comply with commercial Part L

MAX UNIFIED GLARE RATING

10° OPTIC	15° OPTIC	20° OPTIC	35° OPTIC	50° OPTIC	80° OPTIC
NO LENS	SOFT FOCUS LENS	SOFT FOCUS LENS	SOFT FOCUS LENS	SOFT FOCUS LENS	WIDE DISTRIBUTION
<10	<13	<13	<16	<19	>19

*UGR VALUES REFLECT WHITE BAFFLE AND 19 WATTS, LOWER UGR VALUES AVAILABLE WITH DIFFERENT FINISHES AND LOWER WATTAGES.

OUTPUT MULTIPLIER

CCT	CCT SCALE
2400K	0.85
2700K	0.97
3000K	1.00
3500K	1.03
4000K	1.08

TUNABLE WHITE MULTIPLIER

ССТ	5000K- 2700K	4000K- 1800K
5000K	1.16	-
4000K	1.08	1.14
3500K	1.04	1.07
3000K	1.00	1.00
2700K	0.96	0.92
2400K	-	0.84
1800K	-	0.69

MEDIA LIGHT LOSS FACTOR

MEDIA LIGHT LUSS FACTOR						
MEDIA	LIGHT LOSS FACTOR					
NO LENS	1.06					
CGL	1.00					
SFL	1.00					
FGL	0.89					
FSFL	0.81					
FLSL	0.82					
HCL	0.74					



luciferlighting.com


© 2025 Lucifer Lighting Company

WARM DIM PERFORMANCE - 25° OPTIC - SOFT FOCUS LENS


INCANDESCENT PROFILE 90L11DWL 2700K - 1800K Full on Dimmed Dimmed Dimmed Dimmed Dimmed Dimmed 100% to 70% to 50% to 20% to 10% to 80% to 2% CCT (K) 2700 2700 2700 1900 1800 2700 2200 Light Output (Lm) 711 569 498 356 142 71 14 Power (W) 11 8.8 7.7 5.5 2.2 1.1 0.2 Efficacy (LPW) 65 65 65 65 65 65 65 90L15DWL Full on Dimmed Dimmed Dimmed Dimmed Dimmed Dimmed 2700K - 1800K to 50% to 20% to 10% 100% to 80% to 70% to 2% CCT (K) 2700 2700 2700 2700 2450 1950 1800 Light Output (Lm) 909 727 636 455 182 91 18 Power (W) 15 12 10.5 7.5 3 1.5 0.3 61 61 Efficacy (LPW) 61 61 61 61 61

90L11DWD Full on 100% Dimmed to 80% Dimmed to 50% Dimmed to 20% Dimmed to 10% Dimmed Dimmed 3000K - 1800K to 70% to 2% CCT (K) 3000 3000 3000 3000 1850 1800 2200 Light Output (Lm) 744 595 521 372 149 74 15 Power (W) 11 8.8 7.7 5.5 2.2 1.1 0.2 Efficacy (LPW) 68 68 68 68 68 68 68 90L15DWD Full on Dimmed Dimmed Dimmed Dimmed Dimmed Dimmed 3000K - 1800K to 70% to 50% to 20% 100% to 80% to 10% to 2% CCT (K) 3000 3000 3000 3000 2700 1900 1800 Light Output (Lm) 935 748 655 468 187 94 19 Power (W) 15 12 10.5 7.5 3 1.5 0.3 Efficacy (LPW) 62 62 62 62 62 62 62

HALOGEN PROFILE

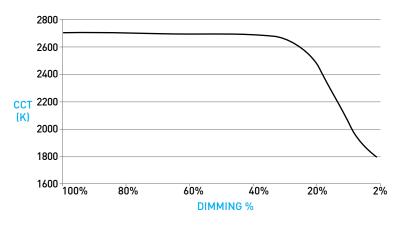



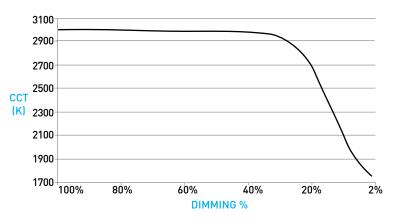





ADJUSTABILITY

Hot-aim tilt up to 40° and 361° rotation with Philips screwdriver, features 5° tilt increment indicators. Sliding pivot point optimizes center beam, ensuring unclipped beam of 15° at 40° tilt and 25° at 30° tilt.

B RETENTION

Integrated metal arm clamps located within fixture body allow discreet flange design, while accommodating varying ceiling thicknesses from 6mm to 54mm. Snap-on spacer clips (2X) supplied for ceiling thickness below 13 mm only.

C OPTIC

Robust light engine with optimized optic pairing integrates Reflection, Refraction, and TIR offering wallwash, 10°, 15°, 25°, 35°, & 50° beams.

10° FIELD REDUCER

Provided with 10° optic. Pairs Soft Focus Lens, Field Reducer, and Honeycomb Louver to deliver tight 10° beam while reducing field angle by 30%.

ADJUSTABLE HCL ASSEMBLY

Honeycomb Louver and Soft Focus Lens attach directly to optic with clip-on lens retainer and adjusts with fixture. Only compatible with no lens baffle. Dry/Damp locations only. Specified as "HS" Effects Device

MICROFLANGE PROFILE

Provides industry standard 11mm total contractor (goof) allowance with 7mm flange. Thickness measures 1.5mm. IP64 Wet location features integral silicone gasket.

G TRIMLESS GYPSUM PROFILE

Installs totally flush with the ceiling with no visible trim. Features integrated appliqué for plaster floating directly to the baffle. Not recommended for stucco applications.

EFFECTS DEVICES / LENS RETAINER

Fixture is limited to 1 effects device installed on the baffle, see Section D for Adjustable HCL assembly. Wet location effects device is sealed in place on baffle, suction tool provided for removal of baffle. Lens retainer allows effects devices to be changed in Dry /Damp locations.


ROUND / SQUARE BAFFLE

Die-cast removable baffle provides easy access to adjustment mechanisms for tilt and rotation. Features 60° glare cutoff, minimizing aperture glare and concealing view into housing. Includes gasket, mitigating light leak.

SQUARE TRANSITIONAL BAFFLE

Transitions from square aperture at ceiling to round aperture at light source. Die-cast removable baffle provides easy access to adjustment mechanisms for tilt and rotation. Features 60° glare cutoff, minimizing aperture glare and concealing view into housing. Includes gasket, mitigating light leak.



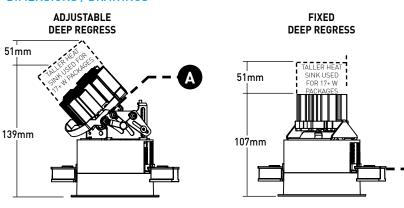



ROUND

Ø92mm


Ø171mm


Ξ


G



SQUARE





















LIGHTING COMPA

[DATE OF REV: 05202025]

luciferlighting.com

© 2025 Lucifer Lighting Company


46mr

DOWNLIGHT FITTING

TRIMLESS MILLWORK PROFILE / SPACERS No visible flange, installs totally flush with millwork. Requires rigid backing for installation. Includes (1) 1.5mm spacer and (5) 3mm spacers.

CONCRETE POUR HOUSING / PROFILE

- Provided with install types "KC and KR".
- Ships separate from downlight and power supply.
 Features 4 conduit entries compatible with 20mm and 25mm ENT. Includes tunnel to accommodate
- installation of power supply.Includes tunnel to accommodate installation of power supply.
- Features broad mounting tolerance area for trim location.

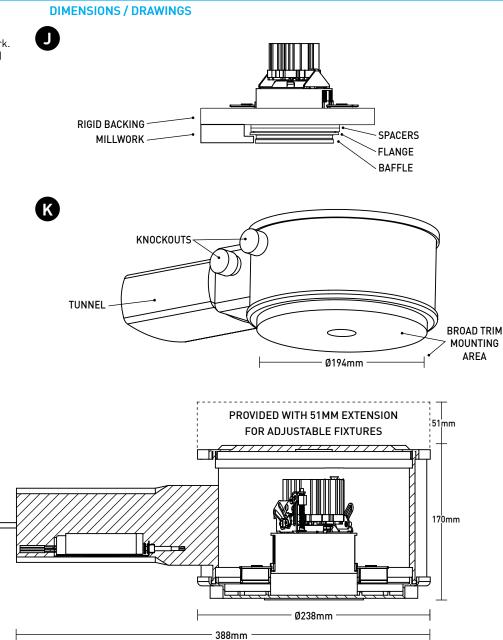




luciferlighting.com

© 2025 Lucifer Lighting Company

L

POWER SUPPLY

- FITTING WITH NON-IC TETHERED POWER SUPPLY
- Requires 86mm cutout.
- Features quick-connect plug between fitting and power supply.
- Minimum 19mm clearance from top of fitting.
- Minimum setback from combustible and noncombustible materials of 168mm radius from fitting centerline; minimum 76mm from surfaces of power supply if not situated within above noted radius from fitting centerline.
- Minimum additional 76mm setback from insulation material with max R-Value 30 from any surface of downlight fitting assembly.
- Minimum additional 152mm setback from polycell spray foam insulation with max R-Value 60 from any surface of downlight fitting assembly.
- Consult factory for spacing requirements for any installations exceeding R-Value 60.
- Do not install in environments where ambient temperatures exceed 40°C (104°F).

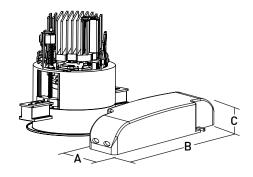

POWER SUPPLY DIMENSIONS								
Model A B C								
PH1	85mm	176mm	51mm					
IG1								
IN1	41mm	210mm	34mm					
ID1								
MD2	43mm	150mm	26mm					



TECHNICAL

CONSTRUCTION

<u>Downlight</u>: Painted finishes are granulated powder coat. Forged aluminum heat-sink. Appliqué: Zinc alloy.

STATIC WHITE LED

2-step MacAdam ellipse LED module available in 80+, 90+ and 97+ CRI configurations in color temperatures of 2700K, 3000K, 3500K and 4000K. 3-step MacAdam ellipse LED module available in 90+ CRI configuration in color temperature of 2400K. Average rated lamp life of 50,000 hours. LED and driver assemblies are field-replaceable.

WARM DIM LED

3-step MacAdam ellipse warm dim LED module available in 90+ CRI configuration. 3000K or 2700K at full brightness, warming to 1800K at full dim. Average rated lamp life of 50,000 hours. LED and driver assemblies are field-replaceable.

TUNABLE WHITE LED 🕓

3-step MacAdam ellipse tunable white LED module available in 90+ CRI configuration. Features tuning ranges of 1800K to 4000K and 2700K to 5000K. Average rated lamp life of 50,000 hours. LED and driver assemblies are field-replaceable.

POWER SUPPLY PERFORMANCE AND DIMMING INFORMATION

	PHASE	0-1	IOV	DAI	_l-2
Power Supply	PH1	IG1 IN1		ID1	MD2
Minimum °C	-20°C	-20°C	-20°C	-20°C	-40°C
Maximum °C	40 °C	40 °C	40 °C	40 °C	40 °C
Dimming %	2.0%	0.1%	0.1%	0.1%	0.1%

Note: For IG1 and IN1 drivers consult chart on page 9 to confirm appropriate dimming curve for compatibility with selected control.

MAXIMUM ALLOWABLE REMOTE DRIVER WIRING DISTANCES

	WIRE AWG					
DRIVER	12	14	16	18	20	
PH1	285'	180'	113'	71'	45'	
IG1, IN1, ID1	-	-	118'	72	46'	

LISTING

CE Listed for IP20 Dry / Damp and IP64 Wet locations. NEMA 410 Compliant.

DECLARE

LBC Red List Approved.

WEIGHT

Fixture - 3 lbs max Remote Driver - 1.4 lbs

LIMITED WARRANTY

Manufacturer's Limited Warranty guarantees product(s) listed to be free from defects in material and workmanship under normal use and service for 1-year. LED and power supplies are warranted to operate with 70% of original flux and remain within a range of 3 duv for a period of 5-years. 10-year Lutron Advantage limited warranty available on Lutron equipped systems. Warranty period begins from the date of shipment by Seller. Consult website for full warranty terms and conditions.

CHANGE LOG

1.05/07/2025: UPDATED WARM DIM OFFERING. ADDED PH1 DRIVER.



[PH] +1-210-227-7329

[FAX] +1-210-227-4967

pg. 8



© 2025 Lucifer Lighting Company

DIMMING COMPATIBILITY

PHILIPS DRIVER COMPATIBILITY

Power supply PH1 Manufacturer	Family/Model #
Lutron Electronics	DV-600P
Lutron Electronics	DVELV-303P
Lutron Electronics	NTELV-600
Lutron Electronics	MAELV-600
Lutron Electronics	SELV-300P
Lutron Electronics	DVLV-600P
Lutron Electronics	NFTU-5A
Lutron Electronics	CTCL-153P
Lutron Electronics	GL-600H
Lutron Electronics	S-600P
Lutron Electronics	РНРМ

eldoLED DRIVER COMPATIBILITY

Synergy ISD BC Crestron® GLX-DIMFLV8 Crestron® GLXP-DIMFLV8 Crestron® GLPAC-DIMFLV4-* Crestron® GLPAC-DIMFLV8-* Crestron® GLPP-DIMFLVEX-PM Crestron® GLPP-1DIMFLVEX-PM Crestron® GLPP-1DIMFLV2X-PM Crestron® GLPP-1DIMFLV2X-PM Crestron® GLPP-1DIMFLV3EX-PM Crestron® DIN-A08 Crestron® DIN-4DIMFLV4 Crestron® CLS-EXP-DIMFLV Crestron® CLCI-1DIMFLV2EX Power supply IN1 Family/Model # Lutron Electronics Nova T® - NTFTV Lutron Electronics Nova® - NFTV Lutron Electronics Nova® - NFTV Lutron Electronics Nova® - NFTV	Power supply IG1 Manufacturer	Family/Model #
Leviton Lighting ControlsIP710-DLXLightolier ControlsZP600FAM120Merten5729Pass & SeymourCD4FB-WThe Watt StopperDCLV1SynergyISD BCCrestron®GLX-DIMFLV8Crestron®GLPAC-DIMFLV8Crestron®GLPAC-DIMFLV8-*Crestron®GLPP-DIMFLV8-*Crestron®GLPP-DIMFLV8-*MCrestron®GLPP-1DIMFLV2EX-PMCrestron®GLPP-1DIMFLV2EX-PMCrestron®GLPP-1DIMFLV3EX-PMCrestron®DIN-A08Crestron®CLCI-1DIMFLV4Crestron®CLCI-1DIMFLV4Crestron®CLCI-1DIMFLV2EXPower supply IN1Family/Model #Lutron ElectronicsNova T® - NTFTVLutron ElectronicsNova® - NFTVLutron ElectronicsFarikze® GRX-TVI w GRX3503Lutron ElectronicsTVM2 ModuleSensor SwitchnI0 EZ	Busch-Jaeger	2112U-101
Lightolier ControlsZP600FAM120Merten5729Pass & SeymourCD4FB-WThe Watt StopperDCLV1SynergyISD BCCrestron®GLX-DIMFLV8Crestron®GLPAC-DIMFLV8.Crestron®GLPAC-DIMFLV8.*Crestron®GLPP-DIMFLV8.*Crestron®GLPP-DIMFLV8.*Crestron®GLPP-DIMFLVEX-PMCrestron®GLPP-1DIMFLVEX-PMCrestron®GLPP-1DIMFLV2X.PMCrestron®GLPP-1DIMFLV2X.PMCrestron®DIN-A08Crestron®DIN-4DIMFLV4Crestron®CLS-EXP-DIMFLVCrestron®CLCI-1DIMFLV2EXPower supply IN1Family/Model #Lutron ElectronicsNova T® - NTFTVLutron ElectronicsNova® - NFTVLutron ElectronicsRage GRX-TVI w GRX3503Lutron ElectronicsEnergy Savr Node™ - QSN-4T16-SLutron ElectronicsTVM2 ModuleSensor SwitchnI0 EZ	Jung	240-10
Merten 5729 Pass & Seymour CD4FB-W The Watt Stopper DCLV1 Synergy ISD BC Crestron® GLX-DIMFLV8 Crestron® GLPAC-DIMFLV8 Crestron® GLPAC-DIMFLV8-* Crestron® GLPAC-DIMFLV8-* Crestron® GLPP-DIMFLV8-* Crestron® GLPP-DIMFLV8-* Crestron® GLPP-DIMFLV2X-PM Crestron® GLPP-1DIMFLV2X-PM Crestron® GLPP-1DIMFLV3EX-PM Crestron® DIN-A08 Crestron® DIN-4DIMFLV4 Crestron® CLCI-1DIMFLV2EX Power supply IN1 Family/Model # Lutron Electronics Nova T® - NTFTV Lutron Electronics Diva® - DVTV Lutron Electronics Nova® - NFTV Lutron Electronics GrafixEye® GRX-TVI w GRX3503 Lutron Electronics Energy Savr Node [™] - QSN-4T16-S Lutron Electronics TVM2 Module Sensor Switch nI0 EZ	Leviton Lighting Controls	IP710-DLX
Pass & Seymour CD4FB-W The Watt Stopper DCLV1 Synergy ISD BC Crestron® GLX-DIMFLV8 Crestron® GLPAC-DIMFLV8. Crestron® GLPAC-DIMFLV8.* Crestron® GLPAC-DIMFLV8.* Crestron® GLPP-DIMFLV8.* Crestron® GLPP-DIMFLV2X-PM Crestron® GLPP-1DIMFLV2X-PM Crestron® GLPP-1DIMFLV3EX-PM Crestron® DIN-A08 Crestron® DIN-4DIMFLV4 Crestron® DIN-4DIMFLV4 Crestron® CLCI-1DIMFLV2X Power supply IN1 Family/Model # Lutron Electronics Nova T® - NTFTV Lutron Electronics Nova® - NFTV Lutron Electronics Nova® - NFTV Lutron Electronics Reage GRX-TVI w GRX3503 Lutron Electronics Energy Savr Node™ - QSN-4T16-S Lutron Electronics TVM2 Module Sensor Switch nI0 EZ	Lightolier Controls	ZP600FAM120
The Watt Stopper DCLV1 Synergy ISD BC Crestron® GLX-DIMFLV8 Crestron® GLPAC-DIMFLV8 Crestron® GLPAC-DIMFLV8-* Crestron® GLPAC-DIMFLV8-* Crestron® GLPP-DIMFLVEX-PM Crestron® GLPP-1DIMFLVEX-PM Crestron® GLPP-1DIMFLV2X-PM Crestron® GLPP-1DIMFLV2X-PM Crestron® GLPP-1DIMFLV3EX-PM Crestron® DIN-A08 Crestron® DIN-4DIMFLV4 Crestron® DIN-4DIMFLV4 Crestron® DIN-4DIMFLV4 Crestron® CLS-EXP-DIMFLV Crestron® CLCI-1DIMFLV2EX Power supply IN1 Family/Model # Lutron Electronics Nova T® - NTFTV Lutron Electronics Nova® - NFTV Lutron Electronics Nova® - NFTV Lutron Electronics GrafixEye® GRX-TVI w GRX3503 Lutron Electronics Energy Savr Node [™] - QSN-4T16-S Lutron Electronics TVM2 Module Sensor Switch nI0 EZ	Merten	5729
Synergy ISD BC Crestron® GLX-DIMFLV8 Crestron® GLXP-DIMFLV8 Crestron® GLPAC-DIMFLV8-* Crestron® GLPAC-DIMFLV8-* Crestron® GLPP-DIMFLV8-* Crestron® GLPP-DIMFLV2-PM Crestron® GLPP-1DIMFLV2X-PM Crestron® GLPP-1DIMFLV2X-PM Crestron® GLPP-1DIMFLV3EX-PM Crestron® DIN-A08 Crestron® CLS-EXP-DIMFLV Crestron® CLCI-1DIMFLV2EX Power supply IN1 Family/Model # Lutron Electronics Nova T® - NTFTV Lutron Electronics Nova® - NFTV Lutron Electronics RafixEye® GRX-TVI w GRX3503 Lutron Electronics Energy Savr Node TM - QSN-4T16-S Lutron Electronics TVM2 Module Sensor Switch nI0 EZ	Pass & Seymour	CD4FB-W
Grestron® GLX-DIMFLV8 Crestron® GLXP-DIMFLV8 Crestron® GLPAC-DIMFLV4-* Crestron® GLPAC-DIMFLV8-* Crestron® GLPP-DIMFLVEX-PM Crestron® GLPP-1DIMFLVEX-PM Crestron® GLPP-1DIMFLV2X-PM Crestron® GLPP-1DIMFLV3EX-PM Crestron® DIN-A08 Crestron® DIN-4DIMFLV4 Crestron® CLS-EXP-DIMFLV Crestron® CLCI-1DIMFLV2EX Power supply IN1 Family/Model # Lutron Electronics Nova T® - NTFTV Lutron Electronics Nova ® - NFTV Lutron Electronics RafixEye® GRX-TVI w GRX3503 Lutron Electronics Energy Savr Node TM - QSN-4T16-S Lutron Electronics TVM2 Module Sensor Switch nI0 EZ	The Watt Stopper	DCLV1
Crestron® GLXP-DIMFLV8 Crestron® GLPAC-DIMFLV4-* Crestron® GLPAC-DIMFLV8-* Crestron® GLPP-DIMFLVEX-PM Crestron® GLPP-1DIMFLVEX-PM Crestron® GLPP-1DIMFLV2X-PM Crestron® GLPP-1DIMFLV3EX-PM Crestron® DIN-A08 Crestron® DIN-4DIMFLV4 Crestron® CLS-EXP-DIMFLV Crestron® CLCI-1DIMFLV2EX Power supply IN1 Family/Model # Lutron Electronics Nova T® - NTFTV Lutron Electronics Nova® - NFTV Lutron Electronics Rowa® - NFTV Lutron Electronics GrafixEye® GRX-TVI w GRX3503 Lutron Electronics Energy Savr Node [™] - QSN-4T16-S Lutron Electronics TVM2 Module Sensor Switch nI0 EZ	Synergy	ISD BC
Crestron® GLPAC-DIMFLV4-* Crestron® GLPAC-DIMFLV8-* Crestron® GLPP-DIMFLVEX-PM Crestron® GLPP-1DIMFLV2X-PM Crestron® GLPP-1DIMFLV3EX-PM Crestron® DIN-A08 Crestron® CLS-EXP-DIMFLV Crestron® CLS-EXP-DIMFLV Crestron® CLCI-1DIMFLV2EX Power supply IN1 Family/Model # Lutron Electronics Nova T® - NTFTV Lutron Electronics Nova® - NFTV Lutron Electronics RafixEye® GRX-TVI w GRX3503 Lutron Electronics Energy Savr Node™ - QSN-4T16-S Lutron Electronics TVM2 Module Sensor Switch nI0 EZ	Crestron®	GLX-DIMFLV8
Crestron® GLPAC-DIMFLV8-* Crestron® GLPP-DIMFLV2X-PM Crestron® GLPP-1DIMFLV2X-PM Crestron® GLPP-1DIMFLV3EX-PM Crestron® DIN-A08 Crestron® CLS-EXP-DIMFLV Crestron® CLCI-1DIMFLV2EX Power supply IN1 Family/Model # Lutron Electronics Nova T® - NTFTV Lutron Electronics Nova® - NTV Lutron Electronics Rowa® - NFTV Lutron Electronics GrafixEye® GRX-TVI w GRX3503 Lutron Electronics TVM2 Module Sensor Switch nI0 EZ	Crestron®	GLXP-DIMFLV8
Crestron® GLPP-DIMFLVEX-PM Crestron® GLPP-1DIMFLV2EX-PM Crestron® GLPP-1DIMFLV3EX-PM Crestron® DIN-A08 Crestron® DIN-4DIMFLV4 Crestron® CLS-EXP-DIMFLV Crestron® CLCI-1DIMFLV2EX Power supply IN1 Family/Model # Lutron Electronics Nova T® - NTFTV Lutron Electronics Nova® - NFTV Lutron Electronics RafixEye® GRX-TVI w GRX3503 Lutron Electronics Energy Savr Node™ - QSN-4T16-S Lutron Electronics TVM2 Module Sensor Switch nI0 EZ	Crestron®	GLPAC-DIMFLV4-*
Crestron® GLPP-1DIMFLV2EX-PM Crestron® GLPP-1DIMFLV3EX-PM Crestron® DIN-A08 Crestron® DIN-4DIMFLV4 Crestron® CLS-EXP-DIMFLV Crestron® CLCI-1DIMFLV2EX Power supply IN1 Family/Model # Lutron Electronics Nova T® - NTFTV Lutron Electronics Nova® - DVTV Lutron Electronics RafixEye® GRX-TVI w GRX3503 Lutron Electronics Energy Savr Node™ - QSN-4T16-S Lutron Electronics TVM2 Module Sensor Switch nI0 EZ	Crestron®	GLPAC-DIMFLV8-*
Crestron® GLPP-1DIMFLV3EX-PM Crestron® DIN-A08 Crestron® DIN-4DIMFLV4 Crestron® CLS-EXP-DIMFLV Crestron® CLCI-1DIMFLV2EX Power supply IN1 Family/Model # Lutron Electronics Nova T® - NTFTV Lutron Electronics Nova® - DVTV Lutron Electronics ReafixEye® GRX-TVI w GRX3503 Lutron Electronics Energy Savr Node™ - QSN-4T16-S Lutron Electronics TVM2 Module Sensor Switch nI0 EZ	Crestron®	GLPP-DIMFLVEX-PM
Crestron® DIN-A08 Crestron® DIN-4DIMFLV4 Crestron® CLS-EXP-DIMFLV Crestron® CLCI-1DIMFLV2EX Power supply IN1 Family/Model # Lutron Electronics Nova T® - NTFTV Lutron Electronics Diva® - DVTV Lutron Electronics Rova® - NFTV Lutron Electronics GrafixEye® GRX-TVI w GRX3503 Lutron Electronics Energy Savr Node™ - QSN-4T16-S Lutron Electronics TVM2 Module Sensor Switch nI0 EZ	Crestron®	GLPP-1DIMFLV2EX-PM
Crestron® DIN-4DIMFLV4 Crestron® CLS-EXP-DIMFLV Crestron® CLCI-1DIMFLV2EX Power supply IN1 Family/Model # Lutron Electronics Nova T® - NTFTV Lutron Electronics Diva® - DVTV Lutron Electronics Nova ® - NFTV Lutron Electronics GrafixEye® GRX-TVI w GRX3503 Lutron Electronics Energy Savr Node™ - QSN-4T16-S Lutron Electronics TVM2 Module Sensor Switch nI0 EZ	Crestron®	GLPP-1DIMFLV3EX-PM
Crestron® CLS-EXP-DIMFLV Crestron® CLCI-1DIMFLV2EX Power supply IN1 Family/Model # Lutron Electronics Nova T® - NTFTV Lutron Electronics Diva® - DVTV Lutron Electronics Nova ® - NFTV Lutron Electronics GrafixEye® GRX-TVI w GRX3503 Lutron Electronics Energy Savr Node™ - QSN-4T16-S Lutron Electronics TVM2 Module Sensor Switch nI0 EZ	Crestron®	DIN-A08
Crestron® CLCI-1DIMFLV2EX Power supply IN1 Family/Model # Lutron Electronics Nova T® - NTFTV Lutron Electronics Diva® - DVTV Lutron Electronics Nova ® - NFTV Lutron Electronics GrafixEye® GRX-TVI w GRX3503 Lutron Electronics Energy Savr Node™ - QSN-4T16-S Lutron Electronics TVM2 Module Sensor Switch nI0 EZ	Crestron®	DIN-4DIMFLV4
Power supply IN1 Family/Model # Lutron Electronics Nova T® - NTFTV Lutron Electronics Diva® - DVTV Lutron Electronics Nova ® - NFTV Lutron Electronics GrafixEye® GRX-TVI w GRX3503 Lutron Electronics Energy Savr Node™ - QSN-4T16-S Lutron Electronics TVM2 Module Sensor Switch nI0 EZ	Crestron®	CLS-EXP-DIMFLV
Lutron Electronics Nova T® - NTFTV Lutron Electronics Diva® - DVTV Lutron Electronics Nova® - NFTV Lutron Electronics GrafixEye® GRX-TVI w GRX3503 Lutron Electronics Energy Savr Node™ - QSN-4T16-S Lutron Electronics TVM2 Module Sensor Switch nI0 EZ	Crestron®	CLCI-1DIMFLV2EX
Lutron Electronics Diva® - DVTV Lutron Electronics Nova® - NFTV Lutron Electronics GrafixEye® GRX-TVI w GRX3503 Lutron Electronics Energy Savr Node™ - QSN-4T16-S Lutron Electronics TVM2 Module Sensor Switch nI0 EZ	Power supply IN1	Family/Model #
Lutron Electronics Nova® - NFTV Lutron Electronics GrafixEye® GRX-TVI w GRX3503 Lutron Electronics Energy Savr Node™ - QSN-4T16-S Lutron Electronics TVM2 Module Sensor Switch nI0 EZ	Lutron Electronics	Nova T® - NTFTV
Lutron Electronics GrafixEye® GRX-TVI w GRX3503 Lutron Electronics Energy Savr Node™ - QSN-4T16-S Lutron Electronics TVM2 Module Sensor Switch nI0 EZ	Lutron Electronics	Diva® - DVTV
Lutron Electronics Energy Savr Node™ - QSN-4T16-S Lutron Electronics TVM2 Module Sensor Switch nI0 EZ	Lutron Electronics	Nova® - NFTV
Lutron Electronics TVM2 Module Sensor Switch nIO EZ	Lutron Electronics	GrafixEye® GRX-TVI w GRX3503
Sensor Switch nIO EZ	Lutron Electronics	Energy Savr Node™ - QSN-4T16-S
	Lutron Electronics	TVM2 Module
ABB SD/S 2.16.1	Sensor Switch	nIO EZ
	ABB	SD/S 2.16.1

LIN = LINEAR LOG = LOGARITHMIC

*LIN-TO-LIN NOT COMPATIBLE FOR WARM-DIM



luciferlighting.com

© 2025 Lucifer Lighting Company