


0 SERIES FIXED REMODEL

PROJECT NAME:	TYPE:
---------------	-------

- Max output of 990lm at 80+ CRI
- Available with trimless and zero sightline baffles, featuring 0.5" aperture
- Features warm dim LED range, from 3000K to 1800K
- Shipping October 2024, Patent pending

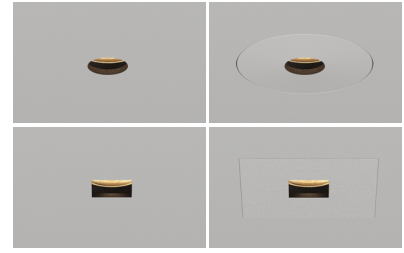

ORDERING INFORMATION - FIXTURE

TRIM	RATING	TYPE	BAFFLE & MOUNTING	EXTERIOR FINISH	INTERIOR FINISH	CRI	WATTAGE	CCT	OPTIC	MEDIA	INSTALL TYPE	CEILING THICKNESS	DRIVER
		F			BK							1	
ORM 1/2" Round Micro	1 IP20 Dry/Damp	F Fixed	T Trimless	TRIMLESS TG Trimless Gypsum* *(Required for trimless gypsum)	BK Black	STATIC WHITE 80S 80+ CRI 90S 90+ CRI 95S 95+ CRI	06C 6W, 443 lm 11C 11W, 712 lm 15C 15W, 856 lm	24 2400K* *(90 CRI only) 27 2700K 30 3000K 35 3500K 40 4000K	20 20° 30 30° 40 40°	NL No Lens 01 Clear Film* *(Required for wet location)	REMODEL RR Remote Remodel	1 0.50" -1.50"	REMOTE PH1 Forward / Reverse Phase, 2%, 120V SG1 eldoLED, ECOdrive 1%, 0-10V, LOG, 120V-277V SN1 eldoLED, ECOdrive 1%, 0-10V, LIN, 120V-277V EG1 eldoLED, SOLOdrive 0.1% 0-10V, LOG, 120V-277V EN1 eldoLED, SOLOdrive 0.1% 0-10V, LIN, 120V-277V ED1 eldoLED, SOLOdrive 0.1% DALI-2, LOG, 120V-277V LP1 Lutron, Hi-Lume Premier Ecosystem 0.1% Fade to Black, 120V or 277V AS1 / ASR Athena Control eldoLED, SOLOdrive 0.1%, 120V-277V* *(Includes Athena Node. Extended lead time, consult factory. ASR includes shunt) CS1 / CSR Casambi Control eldoLED, SOLOdrive 0.1%, 120V-277V* *(Includes Casambi Node. Extended lead time, consult factory. CSR includes shunt)
OSM 1/2" Square Micro	2 IP64 Wet		G Zero Sightline Gypsum	ZERO SIGHTLINE POWDERCOAT WH White AG Satin Silver AU Cashmere Gold AB Architectural Bronze BB Burnt Bronze BK Black SB Specular Black PR Primer CF Custom Finish* *(Consult Factory) PLATED CH Chrome IG Industrial Gray MB Matte Bronze PB Polished Bronze SS Stainless Steel ALUMINA 01 Brushed Obsidian 02 Matte Obsidian 03 Brushed Dark Patinated Bronze 04 Matte Dark Patinated Bronze 05 Brushed Aged Aluminum 06 Matte Aged Aluminum 07 Brushed Cast Brass 08 Matte Cast Brass 09 Brushed Light Patinated Bronze 10 Matte Light Patinated Bronze	FINISH IMAGES ON PAGE 2		WARM DIM 15D 15W Halogen Profile 596 lm 90W 90+ CRI	WD 3000K-1800K					DELIVERED LUMEN OUTPUTS REFLECT 3000K, 40° OPTIC, AND NO LENS.

PART NUMBER NOTES

- Fixture ships as e.g., 0RM1FTTGAUBK90S15C3540NLR1SG1
- Housing, driver, trim, and applique ship as one unit



0 SERIES FIXED REMODEL

ACCESSORIES

REPLACEMENT OPTICS

Interchangeable optics accessible through fixture aperture.

- RO-17-20** 20° optic
- RO-17-30** 30° optic
- RO-17-40** 40° optic

REPLACEMENT BAFFLE ASSEMBLY (INCLUDES MEDIA)

ASSEMBLY	SHAPE	RATING	TYPE	BAFFLE	EXTERIOR FINISH	INTERIOR FINISH	MEDIA
RBA			F			BK	
REPLACEMENT BAFFLE ASSEMBLY	ORM Round OSM Round	1 IP20 Dry/Damp 2 IP64 Wet* * (Suction cup provided for aim and focus)	F Fixed	T Trimless G Zero Sightline	TG Trimless Gypsum WH White AG Satin Silver AU Cashmere Gold AB Arch. Bronze BB Burnt Bronze BK Black PR Primer CF Custom Finish* *(Consult Factory) *See page 1 for plated and Alumina finish options	BK Black	NL No Lens 01 Clear Glass Lens

REPLACEMENT INSTALLATION TOOLS

One included with every six fixtures designated Wet location.

- 01S-TOOL-BAFFLE-REMOVAL** Allows for removal of baffle with Wet location
- 01S-TOOL-ENGINE-INST-REMOVAL** Allows for installation of LED module
- 01S-TOOL-ENGINE-BAFFLE-COMBO** Includes both baffle removal tool and LED module installation tool.


EMERGENCY LIGHTING - REMOTE MOUNT ONLY

During disruption of main power, emergency battery inverter provides temporary 120V or 277V to fixture.

- EMB-S-25-120/277-LEDX** 25 watt max capacity, 120 or 277 VAC 60Hz, Non-Dimmable
- EMB-S-100-120-LEDX** 100 watt max capacity, 120 VAC 60Hz, 0-10V Dimmable
- EMB-S-100-277-LEDX** 100 watt max capacity, 277 VAC 60Hz, 0-10V Dimmable
- EMB-S-250-120/277-LEDX** 250 watt max capacity, 120 or 277 VAC 60Hz, 0-10V Dimmable

***SHUNT REQUIRED FOR USE WITH ATHENA AND CASAMBI CONTROLS, CONSULT FACTORY FOR DETAILS.**

POWDERCOAT FINISHES

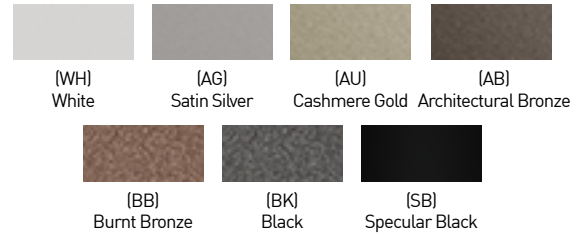

PLATED FINISHES



ALUMINA FINISHES BY LUCIFER LIGHTING™



0 SERIES FIXED REMODEL

PERFORMANCE - 3000K - NO LENS

LUMEN PACKAGE	WATTS	20° OPTIC		30° OPTIC		40° OPTIC	
		DLVD	LPW	DLVD	LPW	DLVD	LPW
80S06C	6	251	41	404	67	485	80
80S11C	11	384	34	618	56	743	67
80S15C	15	513	34	824	54	990	66
90S06C	6	217	36	349	58	419	69
90S11C	11	332	30	534	48	642	58
90S15C	15	443	29	712	47	856	57
95S06C	6	156	25	251	41	301	50
95S11C	11	239	21	384	34	461	41
95S15C	15	318	21	511	34	615	40
90W15D	15	389	25	482	32	596	39

OUTPUT MULTIPLIER

CCT	CCT SCALE
2400K	0.89
2700K	0.98
3000K	1.00
3500K	1.09
4000K	1.14


MEDIA LIGHT LOSS MULTIPLIER

MEDIA	LIGHT LOSS FACTOR
NO LENS	1.00
LENS	0.93

WARM DIM PERFORMANCE - NO LENS - 40° OPTIC

HALOGEN DIMMING PROFILE

90W15CWD 3000K - 1800K	Full on 100%	Dimmed to 80%	Dimmed to 70%	Dimmed to 50%	Dimmed to 20%	Dimmed to 10%	Dimmed to 2%
CCT (K)	3000	2950	2920	2775	2375	2000	1800
Light Output (Lm)	596	477	417	298	119	60	12
Power (W)	15	12	11	8	3	1.5	0.3
Efficacy (LPW)	39	39	39	39	39	39	39

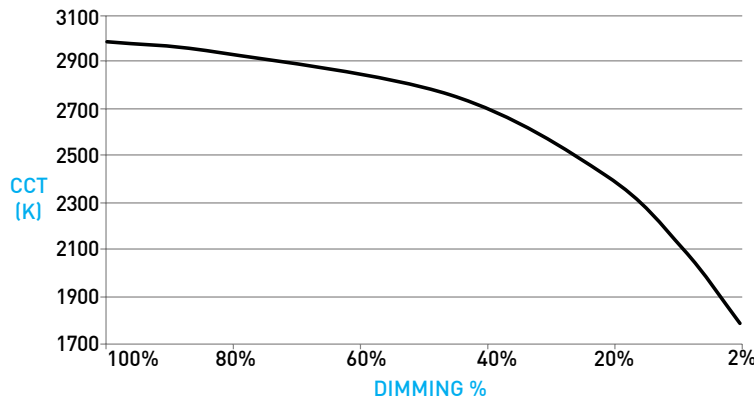

0 SERIES FIXED REMODEL

DOWNLIGHT / HOUSING

A HIGH/LOW WATTAGE REMODEL HOUSING

- For RR installation types.
- IC-rated heatsink, does not have any setback requirements from combustible and non-combustible materials.
- High wattage housing features 2.00" tall heat sink and is available for 15W packages.
- Low wattage housing features 1.25" tall heat sink and is available for 6W and 11W packages only.

B LIGHT ENGINE

Robust light engine with optimized optic pairing integrates Reflection, Refraction, and TIR offering 20°, 30°, and 40° beams.

C REMODEL MOUNTING PLATE

Installs above ceiling, requiring $\varnothing 6.625$ " cutout. Rectangular design (6.15" x 8.00") allows for installation above ceiling after cutout. Mounting holes align with applique, ensuring secure fixture mounting via factory supplied screws.

D ZERO-SIGHTLINE / TRIMLESS DRYWALL PROFILE

Installs totally flush with the ceiling with no visible trim. Appliqué includes screws for mounting and has 0.06" plaster stop. Not recommended for stucco applications.



E ZERO-SIGHTLINE FACEPLATE / BAFFLE

CNC-Milled removable baffle provides 64° glare cutoff. Minimizes aperture glare and conceals view into housing; includes gasket. Exterior faceplate available in powdercoat finishes; interior finish is black powdercoat.

F TRIMLESS BAFFLE


CNC-Milled baffle provides 61° glare cutoff. Minimizes aperture glare and conceals view into housing; includes gasket. Baffle shape is square for both round and square apertures. Only 0.5" inner aperture is visible after mud-in. **1.7" square ceiling break required for LED/driver servicing.**

DIMENSIONS / DRAWINGS

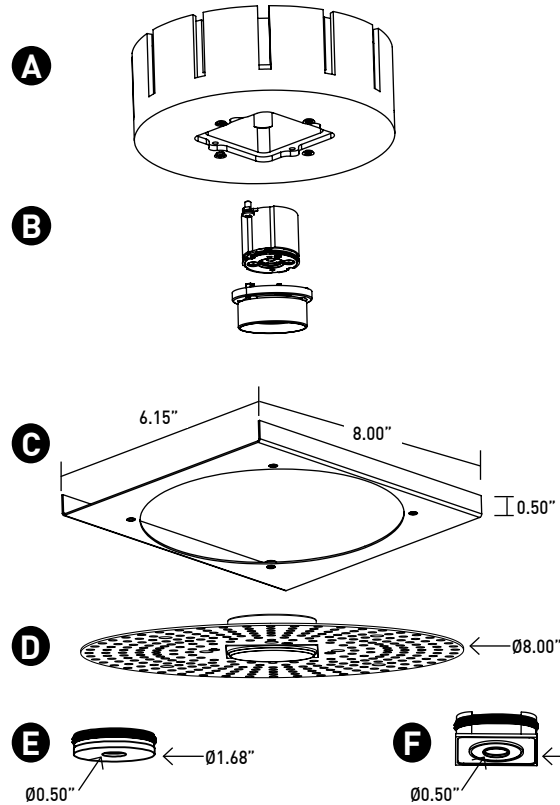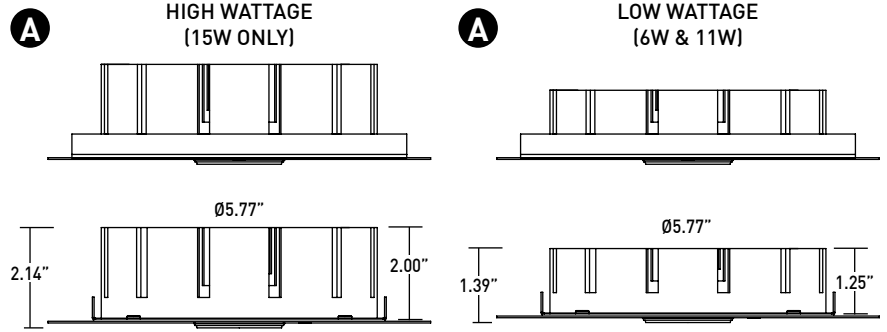


REMODEL NOTES

- Do not install Remodel fixtures in environments where ambient temperatures exceed 40°C (104°F).
- Power supply compartment and all splice connections may be serviced from room side.
- Remodel fixtures accommodate ceiling thicknesses between 0.50" and 1.50".

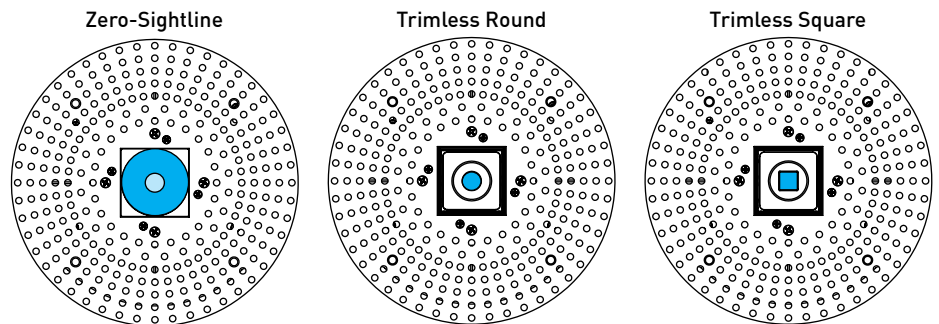

 Visible after mud-in

SECTION VIEW



0 SERIES FIXED REMODEL

DOWNLIGHT / HOUSING

G REMOTE REMODEL APPLICATIONS

- Remote power supply included with "RR" Install Type
- Requires plenum rated Class 2 cable between fixture and remote driver.
- See page 6 for maximum allowable wiring distances.

H ATHENA / CASAMBI CONTROL

Controls integrated Remote driver assembly. All equipment is serviceable.

Athena Model Numbers: A-WN-D01-RF-BL & DFC-OEM-DBI



Casambi Model Number: BT-S1E1-5400

I ATHENA / CASAMBI EM SHUNT



Included with drivers specified as ASR, ADR, CSR, or CDR. One required for each wireless EM fixture, requires class 2 control wiring between fixture and shunt. Features integrated test switch.

Model Number: PS-RMT-SHUNT

DIMENSIONS / DRAWINGS

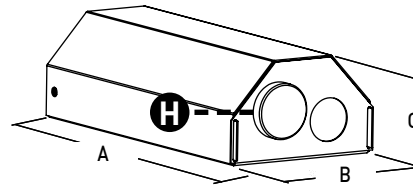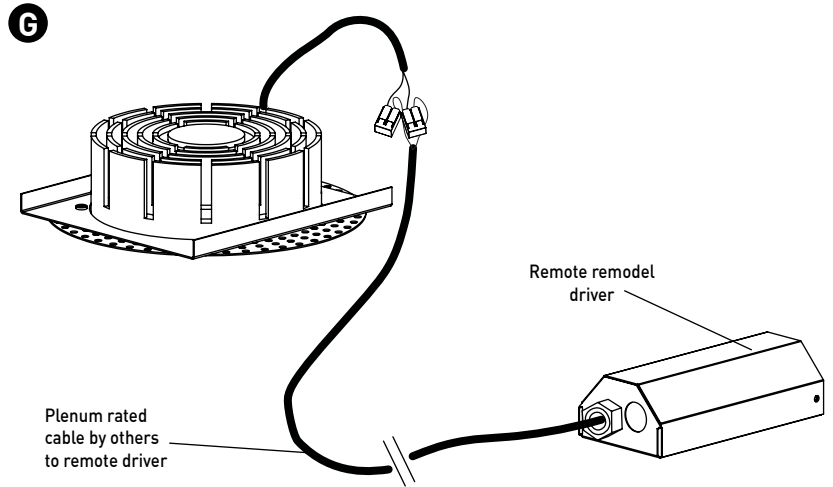

	A	B	C
PHASE / 0-10V / DALI / ECOSYSTEM	6.94"	3.35"	2.00"
ATHENA / CASAMBI	8.10"	5.00"	2.00"

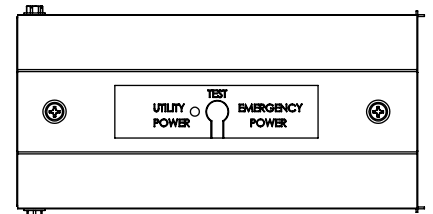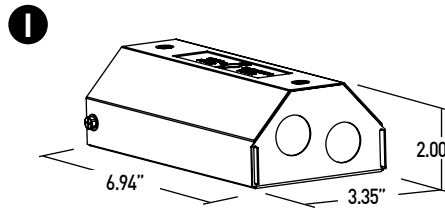

0 SERIES FIXED REMODEL

TECHNICAL

CONSTRUCTION

Downlight: Painted finishes are granulated powder coat; Alumina finishes are anodized aluminum. Plated finishes are plated.

Housing: Forged aluminum heat-sink.

Remote Power Supply: 22 Gauge galvanized steel.

Appliqué: Zinc alloy.

STATIC WHITE LED

2-step MacAdam ellipse LED module available in 80+, 90+, and 95+ CRI configurations in color temperatures of 2700K, 3000K, 3500K and 4000K. 3-step MacAdam ellipse LED module available in 90+ CRI configuration in color temperature of 2400K. Average rated lamp life of 50,000 hours. LED and driver assemblies are field-replaceable.

WARM DIM LED

3-step MacAdam ellipse warm dim LED module available in 90+ CRI configuration. 3000K at full brightness, warming to 1800K at full dim. Average rated lamp life of 50,000 hours. LED and driver assemblies are field-replaceable.

POWER SUPPLY PERFORMANCE AND DIMMING INFORMATION

	PHASE	0-10V				ECO	DALI-2	ATHENA		CASAMBI	
Power Supply	PH1	SG1	SN1	EG1	EN1	LP1	ED1	AS1	AD1	CS1	CD1
Minimum °C	-20 °C	-20 °C	-20 °C	-20 °C	-20 °C	0 °C	-20 °C	0 °C	0 °C	-20 °C	-20 °C
Maximum °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C
Dimming %	2.0%	1.0%	1.0%	0.1%	0.1%	0.1%	0.1%	0.1%	0.1%	0.1%	0.1%
Flicker	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX

Note: For LP1, EG1 and EN1 drivers consult chart on page 7 to confirm appropriate dimming curve for compatibility with selected control.

MAXIMUM ALLOWABLE REMOTE DRIVER WIRING DISTANCES

DRIVER	WIRE AWG				
	12	14	16	18	20
PH1	285'	180'	113'	71'	45'
LP1	60'	40'	25'	15'	-
EG1, EN1, ED1, SG1, SN1, AS1, CS1, AD1, CD1	-	-	118'	72'	46'

LISTING

Pending listing to UL1598 standard for IP20 Dry / Damp and IP64 Wet locations. NEMA 410 Compliant.

DECLARE

LBC Red List Approved.

BUY AMERICAN ACT

Buy American Act compliant.

WEIGHT

1.25" Remodel Housing - 3 lbs

2.00" Remodel Housing - 4 lbs

Remote Driver - 1.4 lbs

LIMITED WARRANTY

Manufacturer's Limited Warranty guarantees product(s) listed to be free from defects in material and workmanship under normal use and service for 1-year. LED and power supplies are warranted to operate with 70% of original flux and remain within a range of 3 duv for a period of 5-years.

10-year Lutron Advantage limited warranty available on Lutron equipped systems. Warranty period begins from the date of shipment by Seller.



0 SERIES FIXED REMODEL

DIMMING COMPATIBILITY

LUTRON DRIVER COMPATIBILITY


Power supply LP1 Lutron Product Family	Part No.
PowPak Dimming Modules	RMJ-EC032-DV-B
PowPak Dimming Modules	FCJ/FCJS-ECO
Energi Savr Nodes	QSN-1ECO-S
GRAFIK Eye QS control unit Homeworks QS control unit	QSN-2ECO-S
GRAFIK Eye QS control unit Homeworks QS control unit	QSGRJ- _E (wireless) QSGR- _E
Quantum Hub	QP2- _ _ 2C
Quantum Hub	QP2- _ _ 4C
Quantum Hub	QP2- _ _ 6C
Quantum Hub	QP2- _ _ 8C
Homeworks QS power module myRoom Plus power module	LQSE-2ECO-D



eldoLED DRIVER COMPATIBILITY

Power supply EG1/SG1 Manufacturer	Family/Model #
Busch-Jaeger	2112U-101
Jung	240-10
Leviton Lighting Controls	IP710-DLX
Lightolier Controls	ZP600FAM120
Merten	5729
Pass & Seymour	CD4FB-W
The Watt Stopper	DCLV1
Synergy	ISD BC
Crestron®	GLX-DIMFLV8
Crestron®	GLXP-DIMFLV8
Crestron®	GLPAC-DIMFLV4-*
Crestron®	GLPAC-DIMFLV8-*
Crestron®	GLPP-DIMFLVEX-PM
Crestron®	GLPP-1DIMFLV2EX-PM
Crestron®	GLPP-1DIMFLV3EX-PM
Crestron®	DIN-A08
Crestron®	DIN-4DIMFLV4
Crestron®	CLS-EXP-DIMFLV
Crestron®	CLCI-1DIMFLV2EX
Power supply EN1/SN1 Manufacturer	Family/Model #
Lutron Electronics	Nova T® - NTFTV
Lutron Electronics	Diva® - DDTV
Lutron Electronics	Nova® - NFTV
Lutron Electronics	GrafixEye® GRX-TVI w GRX3503
Lutron Electronics	Energy Savr Node™ - QSN-4T16-S
Lutron Electronics	TVM2 Module
Sensor Switch	nIO EZ
ABB	SD/S 2.16.1

ANALOG DRIVERS AND DIMMERS

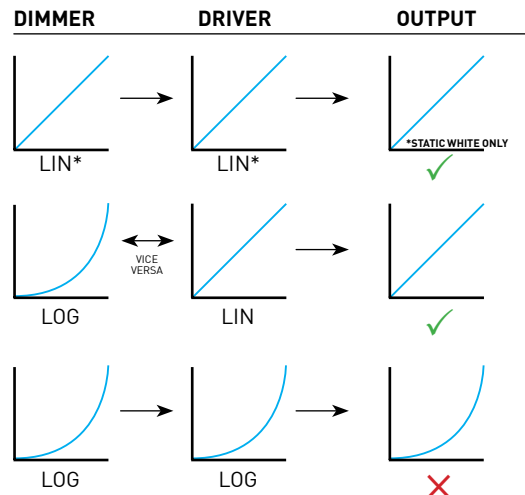

LIN = LINEAR
 LOG = LOGARITHMIC
 *LIN-TO-LIN NOT COMPATIBLE FOR WARM-DIM