

# CYLINDER 2 FIXED & WALLWASH SURFACE MOUNT

PROJECT NAME:

TYPE:



In Q1 2024 we will begin shipping the CY2X in place of the current CY2. This enhanced fixture features dimensions of Ø3.1" x 7.1", lumen outputs up to 2273 lm delivered, more finish options, and additional wet location options. We will continue to receive orders for the CY2 through the end of 2023. See Page 2 for fixture comparison.

## ORDERING INFORMATION - CYLINDER




Quick Ship Product. All rough in components ship within 10 days up to quantities of 100.



JA8-2019 COMPLIANCE INDICATED BY SHADING

CYLINDER	FIXTURE	RATING	CYLINDER FINISH	BAFFLE FINISH	LUMEN PACKAGE	CCT	OPTIC	DRIVER	EFFECTS DEVICE	MOUNTING					
CY2		1													
CY2 3.13"	FB Fixed Body	1 Dry/Damp	WH White	WH White	<b>STATICWHITE</b> <b>80C12A</b> 80+ CRI FB Dlvd. Lumens - 727 WW Dlvd. Lumens - 807 <b>80C19A</b> 80+ CRI FB Dlvd. Lumens - 1121 WW Dlvd. Lumens - 1244 <b>80C25A</b> 80+ CRI FB Dlvd. Lumens - 1488 WW Dlvd. Lumens - 1699 <b>90C10A</b> 90+ CRI FB Dlvd. Lumens - 601 WW Dlvd. Lumens - 691 <b>90C15A</b> 90+ CRI FB Dlvd. Lumens - 926 WW Dlvd. Lumens - 1066 <b>90C20A</b> 90+ CRI FB Dlvd. Lumens - 1230 WW Dlvd. Lumens - 1456 <b>97C09A</b> 97+ CRI FB Dlvd. Lumens - 548 WW Dlvd. Lumens - 618 <b>97C14A</b> 97+ CRI FB Dlvd. Lumens - 845 WW Dlvd. Lumens - 905 <b>97C19A</b> 97+ CRI FB Dlvd. Lumens - 1121 WW Dlvd. Lumens - 1166	<b>22</b> 2200K* *(Only available for 90+ CRI) <b>27</b> 2700K <b>30</b> 3000K <b>35</b> 3500K <b>40</b> 4000K	<b>10</b> 10°* *(Only available for 80C12A, 90C10A, and 97C09A. Not available for 2200K) <b>15</b> 15° <b>25</b> 25° <b>40</b> 40° <b>60</b> 60°	<b>INTEGRAL</b> <b>CA3</b> 120-277V 0-10V Analog <b>CE3</b> 120V Electronic ELV Forward / Reverse Phase  <b>REMOTE (120V)</b> <b>TR2</b> Philips, 2% Leading / Trailing / Triac* *(Only available for 80C19A, 90C15A, 97C14A, and Warm Dim) <b>L23</b> Lutron, Hi-Lume 1% 2-Wire  <b>REMOTE (120-277V)</b> <b>LH1</b> Lutron, Hi-Lume Ecosystem 1% Fade to Black <b>AN4</b> Philips Xitanium 1% 0-10V, LOG <b>LN2</b> Philips Xitanium 1% 0-10V, LIN	<b>STANDARD EFFECTS DEVICE</b> <b>4</b> Soft Focus Lens <b>N</b> No Lens* *(Standard for 10" optic. Not available for Warm Dim) <b>W</b> Wallwash Lens* *(Required and only available for WW fixture)  <b>ALTERNATE EFFECTS DEVICE</b> <b>2</b> Honeycomb Louver* *(Not available for Warm Dim) <b>3</b> Clear Glass Lens* *(Not available for Warm Dim) <b>5</b> Frosted Glass Lens <b>6</b> Frosted Soft Focus Lens <b>7</b> Frosted Linear Spread Lens <b>S</b> Soft Focus Lens w/ Linear Spread Film <b>C</b> Clear Glass Lens w/ Linear Spread Film	<b>ROUGH-IN</b> <b>JBMP</b> 4" Sq. or 4/0 Junction Box Mounting Plate <b>FINISH OUT</b> <b>SMK3</b> 3/0 Surface Mount Kit <b>SMK4</b> 4/0 Surface Mount Kit <b>CMJB</b> 1/2" and 3/4" Conduit Ceiling Mount Junction Box* *(Not available for Wet location. Quick Ship Product for WH and BK finishes only)					
	WW Fixed Body Wallwash		<b>AG</b> Satin Silver* *(Increased lead time) <b>AB</b> Architectural Bronze* *(Increased lead time) <b>BK</b> Black <b>CF</b> Custom Finish* *(Consult Factory)	<b>AG</b> Satin Silver* *(Increased lead time) <b>AB</b> Architectural Bronze* *(Increased lead time) <b>BK</b> Black <b>CF</b> Custom Finish* *(Consult Factory)							<b>90W11A</b> 90+ CRI, Incandescent Profile AD / 9D / AS / 9S Dlvd. Lumens - 931 WW Dlvd. Lumens - 686 <b>90W12A</b> 90+ CRI, Standard Profile AD / 9D / AS / 9S Dlvd. Lumens - 1047 WW Dlvd. Lumens - 771 *SEE PAGE 3 FOR DETAILED WARM DIM PROFILE COMPARISON.	<b>WL</b> 2700K-1800K <b>WD</b> 3000K-1800K	<b>25</b> 25° <b>40</b> 40° <b>60</b> 60°	<b>WW</b> Wallwash* *(Required and only available for WW fixture)	<b>EA2</b> eldoLED, SOLOdrive 0.1% 0-10V, LOG <b>LA2</b> eldoLED, SOLOdrive 0.1% 0-10V, LIN <b>ED1</b> eldoLED, SOLOdrive 0.1% DALI, LOG <b>LD1</b> eldoLED, SOLOdrive 0.1% DALI, LIN
			<b>WARM DIM</b> <b>90W11A</b> 90+ CRI, Incandescent Profile AD / 9D / AS / 9S Dlvd. Lumens - 931 WW Dlvd. Lumens - 686 <b>90W12A</b> 90+ CRI, Standard Profile AD / 9D / AS / 9S Dlvd. Lumens - 1047 WW Dlvd. Lumens - 771 *SEE PAGE 3 FOR DETAILED WARM DIM PROFILE COMPARISON.	<b>WL</b> 2700K-1800K <b>WD</b> 3000K-1800K							<b>25</b> 25° <b>40</b> 40° <b>60</b> 60°	<b>WW</b> Wallwash* *(Required and only available for WW fixture)	<b>EA2</b> eldoLED, SOLOdrive 0.1% 0-10V, LOG <b>LA2</b> eldoLED, SOLOdrive 0.1% 0-10V, LIN <b>ED1</b> eldoLED, SOLOdrive 0.1% DALI, LOG <b>LD1</b> eldoLED, SOLOdrive 0.1% DALI, LIN		
			<b>TUNABLE WHITE</b> <b>90T10A</b> 90+ CRI, Delivered Lumens 1061*		<b>TW</b> 5000K-2700K	<b>15</b> 15° <b>25</b> 25° <b>40</b> 40° <b>60</b> 60°	<b>TUNABLE WHITE REMOTE (120-277V)</b> <b>DD1</b> eldoLED, DUALdrive 0.1% DALI, LOG <b>DG1</b> eldoLED, DUALdrive 0.1% 0-10V, LOG <b>DN1</b> eldoLED, DUALdrive 0.1% 0-10V, LIN								

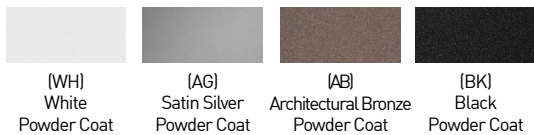

## PART NUMBER NOTES

- Fixed Body ships as e.g., CY2-FB1-WHBK-90C15A2-30CA340
- Wallwash ships as e.g., CY2-WW1-WHBK-90C20A2-WORMTWO
- Remote driver ships as e.g., PS-RMT-90C20A-1L23
- Mounting ships separate from fixture, part numbers listed on page 6.

\*ALL DELIVERED LUMEN OUTPUTS AND T24 COMPLIANCE REFLECT 3000K PAIRED WITH 60° / WW OPTIC AND STANDARD EFFECTS DEVICE. REFERENCE PAGE 3 FOR ADDITIONAL T24 COMPLIANT CONFIGURATIONS.



# CYLINDER 2 FIXED & WW SURFACE MOUNT

## FIXTURE COMPARISON

### CURRENT CY2





### NEW CY2X

CY2-FB

CY2-WW

CY2XFB

CY2XWW

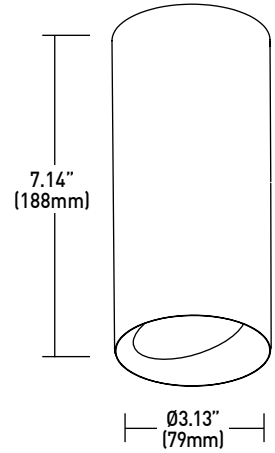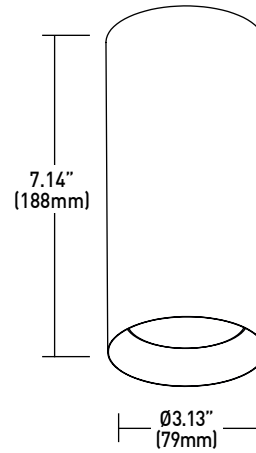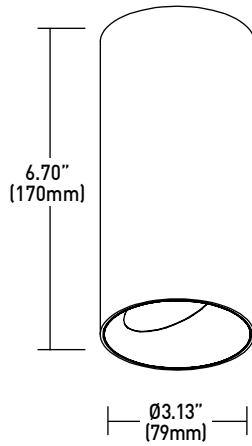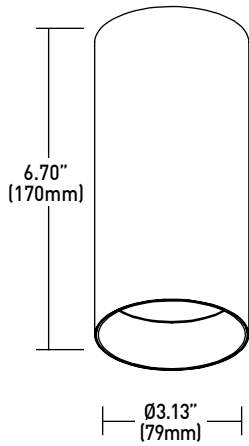

FIXTURE COMPARISON	CURRENT CY2	NEW CY2X
MAX DELIVERED LUMENS	1786	2273
RATING	DRY / DAMP	DRY / DAMP AND WET
FIXTURE FINISHES	POWDERCOAT	POWDERCOAT AND ALUMINA FINISHES BY LUCIFER LIGHTING™
BAFFLE FINISHES	BLACK POWDERCOAT	POWDERCOAT AND ALUMINA FINISHES BY LUCIFER LIGHTING™
EFFECTS DEVICES	1	2
DECLARE	DECLARE LISTED	DECLARE RED LIST APPROVED
BUY AMERICAN ACT	NO	YES

### ALUMINA FINISHES BY LUCIFER LIGHTING™



\*ALUMINA FINISHES ARE ANODIZED ALUMINUM

# CYLINDER 2 FIXED & WW SURFACE MOUNT

## ACCESSORIES

### FIXED BODY ALTERNATE BAFFLE AND EFFECTS DEVICE

Includes baffle with sealed lens. Must specify baffle finish.

**RBA-CY2-\*\*-HCL** Honeycomb Louver \*

\*(Not available for Warm Dim)

**RBA-CY2-\*\*-CGL** Clear Glass Lens \*

\*(Not available for Warm Dim)

**RBA-CY2-\*\*-SFL** Soft Focus Lens

**RBA-CY2-\*\*-FGL** Frosted Glass Lens

**RBA-CY2-\*\*-FSFL** Frosted Soft Focus Lens

**RBA-CY2-\*\*-FLSL** Frosted Linear Spread Lens

**RBA-CY2-\*\*-SFL-LSL** Soft Focus Lens W/ Linear Spread Film

**RBA-CY2-\*\*-CGL-LSL** Clear Glass Lens W/ Linear Spread Film

\*\* Baffle finish: Specify **WH** for white, **BK** for black, **AG** for satin silver or **AB** for architectural bronze.

### FIXED BODY REPLACEMENT OPTICS

Interchangeable optics accessible by removing snoot or baffle.

**RO-70-15-1** 15° optic \*

\*(Not available for Warm Dim)

**RO-70-25-1** 25° optic

**RO-70-40-1** 40° optic

**RO-70-60-1** 60° optic

### TUNABLE WHITE REPLACEMENT OPTICS

Interchangeable optics accessible by removing snoot or baffle. Not available for Wallwash fixtures.

**RO-70-15-2** 15° optic

**RO-70-25-2** 25° optic

**RO-70-40-2** 40° optic

**RO-70-60-2** 60° optic

### FIXED BODY REPLACEMENT SUCTION TOOL

Included with each CY2-FB order (1 per 10 fixtures).

**CY-SQ-TOOL-SUCTION** Baffle assembly removal tool

### EMERGENCY LIGHTING - REMOTE MOUNT ONLY

**EMB-S-20/25-120/277-LEDX** 20/25 watt max capacity, 120 or 277 VAC 60Hz

**EMB-S-100-120-LEDX** 100 watt max capacity, 120 VAC 60Hz

**EMB-S-100-277-LEDX** 100 watt max capacity, 277 VAC 60Hz

**EMB-S-250-120/277-LEDX** 250 watt max capacity, 120 or 277 VAC 60Hz


During disruption of main power, emergency battery inverter provides temporary 120V or 277V to fixture.

# CYLINDER 2 FIXED & WW SURFACE MOUNT

## WALLWASH DESIGN GUIDE




**8FT CEILING**  
**36" SETBACK / 48" ON CENTER SPACING**

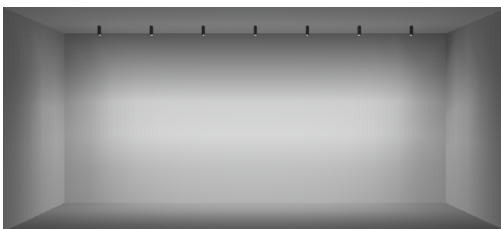

**10FT CEILING**  
**36" SETBACK / 48" ON CENTER SPACING**




**12FT CEILING**  
**36" SETBACK / 48" ON CENTER SPACING**

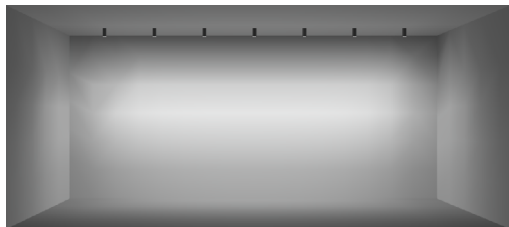

**30" SETBACK / 42" ON CENTER SPACING**


- AVERAGE FC: 16.06
- MAX / MIN: 6.09
- 10FT CEILING SHOWN / 8-12FT IDEAL
- 7 FIXTURES / 25FT WALL SHOWN

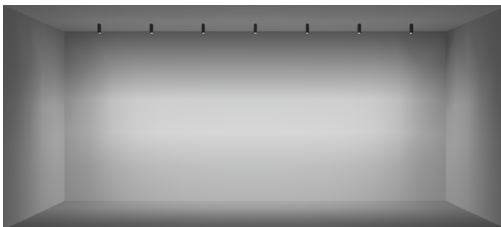

### RECOMMENDED

**36" SETBACK / 48" ON CENTER SPACING**

- AVERAGE FC: 12.89
- MAX / MIN: 6.04
- 10FT CEILING SHOWN / 8-12FT IDEAL
- 7 FIXTURES / 28FT WALL SHOWN

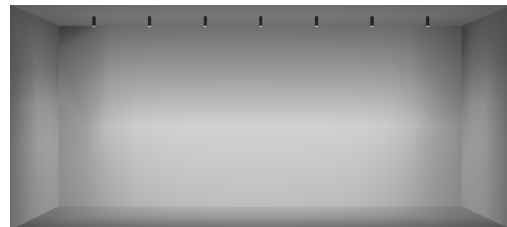

**42" SETBACK / 54" ON CENTER SPACING**

- AVERAGE FC: 10.39
- MAX / MIN: 7.14
- 10FT CEILING SHOWN / 8-12FT IDEAL
- 7 FIXTURES / 32FT WALL SHOWN

### ADDITIONAL SETBACKS AND SPACINGS

ON CENTER SPACING	SETBACK		
	30"	36"	42"
42"	SHOWN ABOVE	AVERAGE FC: 14.44 MAX / MIN: 6.58	AVERAGE FC: 12.87 MAX / MIN: 7.11
48"	AVERAGE FC: 14.34 MAX / MIN: 5.37	SHOWN ABOVE	AVERAGE FC: 11.50 MAX / MIN: 7.00
54"	AVERAGE FC: 12.94 MAX / MIN: 5.83	AVERAGE FC: 11.62 MAX / MIN: 6.30	SHOWN ABOVE

**\*ALL DATA REFLECTS 90C15A LUMEN PACKAGE**

# CYLINDER 2 FIXED & WW SURFACE MOUNT

## STATIC WHITE PERFORMANCE - 3000K

LUMEN PACKAGE	WATTAGE	10° OPTIC NO SOFT FOCUS LENS		15° OPTIC SOFT FOCUS LENS		25° OPTIC SOFT FOCUS LENS		40° OPTIC SOFT FOCUS LENS		60° OPTIC SOFT FOCUS LENS		WALLWASH WALLWASH LENS	
		DELIVERED	LPW	DELIVERED	LPW	DELIVERED	LPW	DELIVERED	LPW	DELIVERED	LPW	DELIVERED	LPW
80C12A	10	1000	58 (17W)	872	87	739	73	727	73	775	78	807	81
80C19A	17	-	-	1345	80	1139	67	1121	67	1196	71	1244	73
80C25A	24	-	-	1786	75	1513	63	1488	62	1587	67	1699	71
90C10A	10	848	49 (17W)	721	72	611	61	601	60	641	64	691	69
90C15A	17	-	-	1112	66	942	55	926	55	988	59	1066	62
90C20A	24	-	-	1476	62	1251	52	1230	52	1312	55	1456	60
97C09A	10	703	41 (17W)	657	66	557	55	548	55	584	58	618	62
97C14A	17	-	-	1014	61	859	50	845	50	901	54	905	53
97C19A	24	-	-	1346	56	1140	47	1121	47	1196	50	1166	49
90W11A	16	-	-	-	-	901	56	766	47	931	58	758	47
90W12A	16	-	-	-	-	1013	63	861	53	1047	64	852	53
90T10A	14	-	-	886	53	875	53	729	44	1061	64	940	56



### JA8-2019 INDICATED BY SHADING


OUTPUT MULTIPLIER	
CCT	CCT SCALE
2200K <small>(Consult factory for JA8 details)</small>	0.800
2700K	0.957
3000K	1.000
3500K	1.019
4000K	1.030

LIGHT LOSS FACTOR MULTIPLIER	
No Lens	1.05
SFL	1.00
CGL	1.00
FGL	0.90
FSFL	0.87
FLSL	0.83
SFL W/ LINEAR SPREAD	0.82
CGL W/ LINEAR SPREAD	0.82
HCL	0.65

## WARM DIM PERFORMANCE - SOFT FOCUS LENS - 60° OPTIC


### STANDARD WARM DIM PROFILE

90W12A 3000K - 1800K	Full on 100%	Dimmed to 80%	Dimmed to 70%	Dimmed to 50%	Dimmed to 20%	Dimmed to 10%	Dimmed to 2%
CCT (K)	3000	2950	2920	2775	2375	2000	1800
Light Output (Lm)	1047	837	732	523	209	104	20
Power (W)	14	11	10	7	3	1.5	0.3
Efficacy (LPW)	64	64	64	64	64	64	64

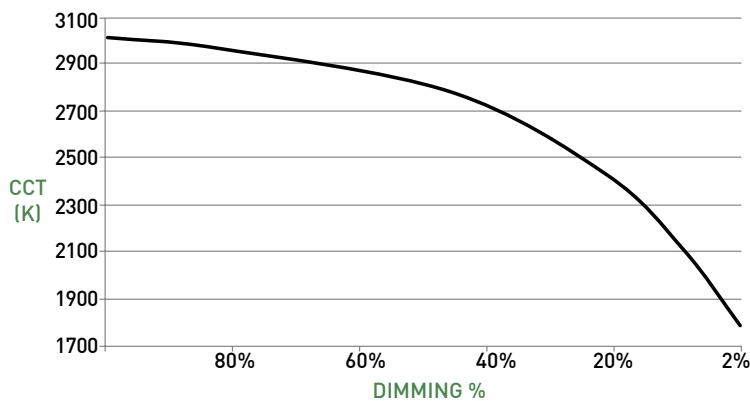

### WARM DIM TO MIRROR INCANDESCENT DIMMING PROFILE

90W11A 2700K - 1800K	Full on 100%	Dimmed to 80%	Dimmed to 70%	Dimmed to 50%	Dimmed to 20%	Dimmed to 10%	Dimmed to 2%
CCT (K)	2700	2650	2620	2520	2180	1950	1800
Light Output (Lm)	931	744	651	465	186	93	18
Power (W)	16	13	11	8	3	1.7	0.3
Efficacy (LPW)	58	58	58	58	58	58	58

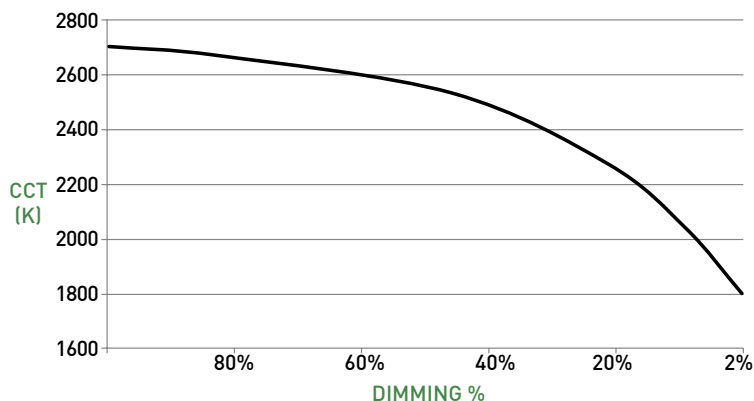


# CYLINDER 2 FIXED & WW SURFACE MOUNT

## CYLINDER ASSEMBLY


- A LUMINAIRE**  
Body with integrated heat sink and LED. Conceals mounting hardware. Power supply may be integral or remote mount.
- B STANDARD OPTICS**  
Proprietary optics available in 10°, 15°, 25°, 40° & 60° beams.
- WALLWASH OPTIC**  
Precision tuned optic provides uniform wallwashing effect.
- C EFFECTS DEVICE**  
Cylinder baffle assembly can accept 1 lens. Soft focus lens, no lens or wallwash lens standard; lenses sealed in place.
- D BAFFLE**  
Baffle minimizes aperture glare and conceals view into fixture. Suction tool provided for removal of CY2-FB baffle.

## DIMENSIONS / DRAWINGS

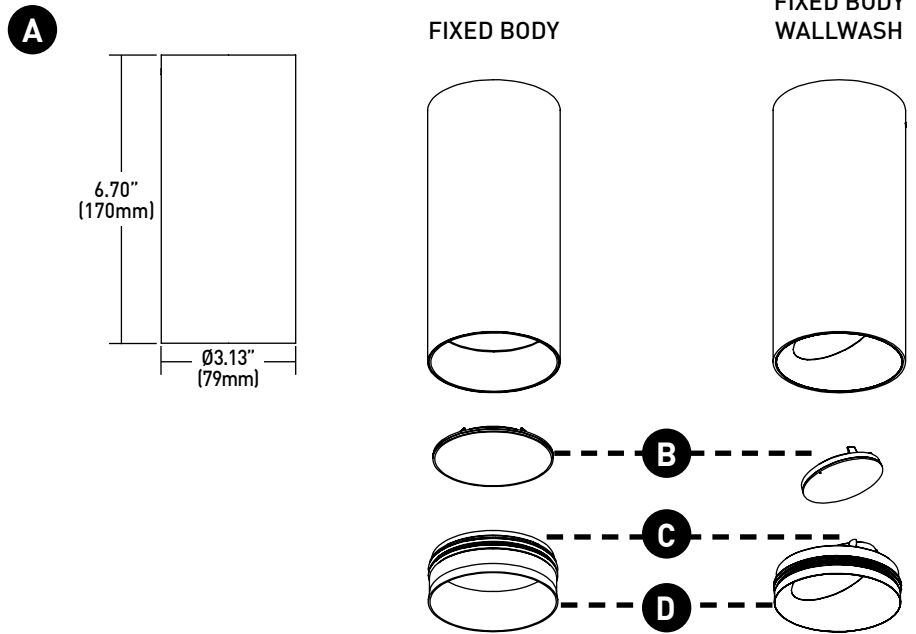

## MOUNTING

- E JBMP**  
Mounting plate (concealed) for standard 4" square or 4" 4/0 j-box. To be installed during rough-in, prior to substrate, for ceiling thicknesses up to 0.75". Fixture to mount flush with minimalist transition to ceiling.  
Part Number - CY2/3-JBMP
- F SMK3**  
Surface mount kit includes mounting plate and 4" concealer plate that installs between fixture and standard 3" 3/0 j-box for existing applications where standard j-box cutout is to be concealed.  
Part Number - CY2/3-SMK-3/0-(FINISH)
- G SMK4**  
Surface mount kit includes mounting plate and 5" concealer plate that installs between fixture and standard 4" 4/0 j-box for existing applications where standard j-box cutout is to be concealed.  
Part Number - CY2/3-SMK-4/0-(FINISH)
- H CMJB**  
Ceiling mount junction box perfectly matches the cylinder profile for a continuous, integrated look where exposed ceiling mount junction box and conduit applications apply. For use with 1/2" and 3/4" EMT conduit only. Features two conduit entrances on either side and one conduit knockout on top of j-box. J-box is IP10 rated; painted finishes only. Blank off plugs included.  
Part Number - CY2-CMJB-(FINISH)

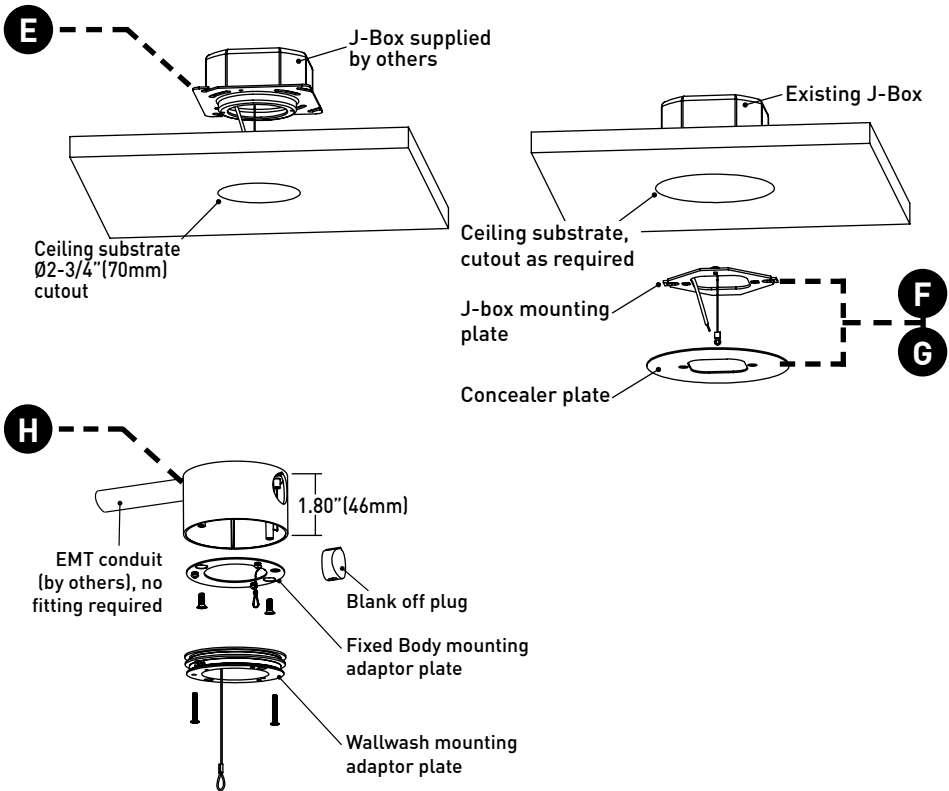


## MOUNTING NOTES

- CY2/3-JBMP and CY2/3-SMK-3/0 & 4/0 not recommended for use with pancake style j-box.
- Fixtures are surface mount and must have access to free air. For applications involving slat ceilings or confined mounting, consult Comprehensive Install Guide for required clearances for proper air flow and servicing.

# CYLINDER 2 FIXED & WW SURFACE MOUNT

## REMOTE POWER SUPPLY

- ❶ **PS-RMT**  
Remote power supply provides additional driver options. Mounting device still required. Consult page 8 for maximum allowable secondary run lengths between PS-RMT and cylinder.

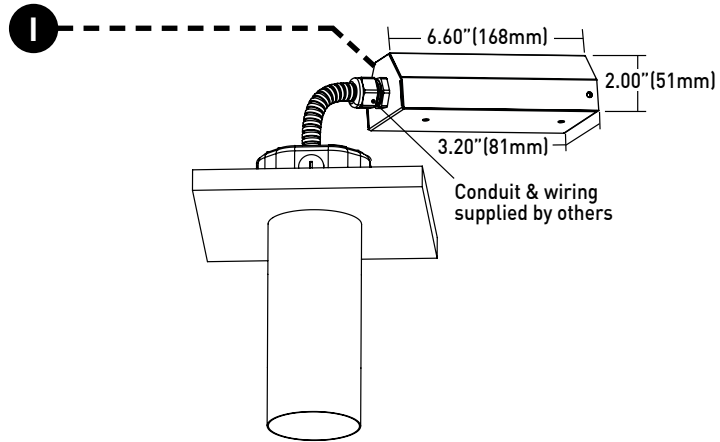

# CYLINDER 2 FIXED & WW SURFACE MOUNT

## TECHNICAL

### CONSTRUCTION

**Cylinder:** Machined aluminum body; extruded aluminum internal heat-sink; painted finishes are granulated powder coat.

**CMJB:** Die-cast aluminum body; painted finishes are granulated powder coat.

**Remote Power Supply:** 22 Gauge galvanized steel.

### STATIC WHITE LED

2-step MacAdam ellipse LED module available in 80+, 90+ and 97+ CRI configurations in color temperatures of 2200K, 2700K, 3000K, 3500K and 4000K. Average rated lamp life: 50,000 hours. LED and driver assemblies are field-replaceable.

### WARM DIM LED

3-step MacAdam ellipse warm dim LED module available in 90+ CRI configuration. 3000K or 2700K at full brightness, warming to 1800K at full dim. Average rated lamp life of 50,000 hours. LED and driver assemblies are field-replaceable.

### TUNABLE WHITE LED

5-step MacAdam ellipse tunable white LED module available in 90+ CRI configuration. Features tuning range of 2700K to 5000K. Average rated lamp life of 50,000 hours. Driver assemblies are field-replaceable.

### POWER SUPPLY PERFORMANCE AND DIMMING INFORMATION

Power Supply	CA3	CE3	TR2	L23	LH1	AN4	LN2	EA2	LA2	ED1	LD1	DN1	DG1	DD1
Minimum °C	-20 °C	-20 °C	-20 °C	0 °C	0 °C	-20 °C	-20 °C	-20 °C	-20 °C	-20 °C	-20 °C	-20 °C	-20 °C	-20 °C
Maximum °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C
Dimming %	2.0%	2.0%	2.0%	1.0%	1.0%	1.0%	1.0%	0.1%	0.1%	0.1%	0.1%	0.1%	0.1%	0.1%

Note: For TR2, L23, LH1, AN4, LN2, EA2 and LA2 drivers consult chart on page 9 to confirm appropriate dimming curve for compatibility with selected control.

### MAXIMUM ALLOWABLE REMOTE DRIVER WIRING DISTANCES

DRIVER	WIRE AWG				
	12	14	16	18	20
TR2, AN4, LN2	285'	180'	113'	71'	45'
L23, LH1	60'	40'	25'	15'	-
EA2, LA2, ED1, LD1, DD1, DG1, DN1	-	-	118'	72'	46'

### WALLWASH SPACING

Factory recommends 48" (1219mm) spacing on center with 36" (914mm) setback from wall plane.

### MOUNTING

Cylinder is supplied with a mounting adaptor plate, which integrates with required additional mounting accessories specified separately according to field application conditions, providing a minimalist transition from standard 4/0 or 4" square junction boxes and accommodating ceiling thicknesses of 0.44" (12mm) to 0.75" (19mm). Ceiling-mount junction box available for 1/2" (13mm) and 3/4" (19mm) conduit and feature concealed internal clamps for clean fitting-free conduit exit and entry.

### LISTING

cTUVus listed to UL1598 standard for Dry / Damp (CY2-FB IP14 and CY2-WW IP30) locations. Title 24 JA8-2019 Listed.

### DECLARE

LBC Declared.

### WEIGHT

Cylinder / Mounting - 2.2 lbs max

Remote Driver - 1.4 lbs

### LIMITED WARRANTY

Manufacturer's 1-year warranty guarantees product(s) listed to be free from defects in material and workmanship under normal use and service. 5-year warranty on LED and power supply to operate with 70% of the original flux and remain within a range of 3 duv. 10-year Lutron Advantage limited warranty available on Lutron equipped systems. Warranty period begins from the date of shipment by Seller and conditional upon the use of manufacturer-supplied power supply. Consult [website](#) for full warranty terms and conditions.

### CHANGE LOG

- 01/12/2021: ADDED 2200K, 2700K-1800K WARM DIM AND 10 DEGREE OPTIC OFFERINGS.
- 04/26/2021: ADDED FIXED BODY WALLWASH, AND LP1 DRIVER OFFERINGS.
- 11/17/2021: UPDATED 25° PHOTOMETRICS.
- 06/21/2022: ADDED SOFT FOCUS LENS W/ LINEAR SPREAD FILM, AND CLEAR GLASS LENS W/ LINEAR SPREAD FILM.
- 10/17/2022: REMOVED 90W13A 3200K-1800K WARM DIM AND ADDED 90W12A 3000K-1800K WARM DIM.
- 12/8/22: ADDED TUNABLE WHITE OFFERING AND RESPECTIVE PERFORMANCE DATA.
- 04/26/2023: ADDED DECLARE LBC APPROVED.



# CYLINDER 2 FIXED & WW SURFACE MOUNT

## DIMMING COMPATIBILITY

### PHILIPS DRIVER COMPATIBILITY

Power supply <b>TR2</b> Manufacturer	Family/Model #
Lutron Electronics	DV-600P
Lutron Electronics	DVELV-303P
Lutron Electronics	NTELV-600
Lutron Electronics	MAELV-600
Lutron Electronics	SELV-300P
Lutron Electronics	DVLV-600P
Lutron Electronics	NFTU-5A
Lutron Electronics	CTCL-153P
Lutron Electronics	GL-600H
Lutron Electronics	S-600P
Lutron Electronics	PHPM
Power supply <b>AN4 / LN2</b> Manufacturer	Family/Model #
Lutron Electronics	DVTV plus PP-DV
Lutron Electronics	DVSCTV plus PP-DV
Lutron Electronics	DVSTV
Lutron Electronics	DVSCSTV
Lutron Electronics	QSGRJ-XP plus GRX-TVI
Lutron Electronics	QSGRJ-XE plus GRX-TVI
Lutron Electronics	QSGR-XE plus GRX-TVI
Lutron Electronics	NFTV plus PP-DV
Lutron Electronics	NTSTV
Lutron Electronics	RMJ-5T
Lutron Electronics	RMJS-8T
Lutron Electronics	FCJS-010
Leviton	IllumaTch IP7 series
Philips	Sunrise - SR1200ZTUNV

### LUTRON DRIVER COMPATIBILITY

Power supply <b>L23</b> Lutron Product Family	Part No.
Maestro WirelessR 600 W dimmer	MRF2-6ND-120-
Maestro WirelessR 1000 W dimmer	MRF2-10ND-120-
Caséta® Wireless Pro 1000 W dimmer	PD-10NXD-
GRAFIK T™ CL® dimmer	GT-250M-GTJ-250M-
HomeWorks® QS adaptive dimmer	HQRD-6NA-
HomeWorks® QS 600 W dimmer	HQRD-6ND-
HomeWorks® QS 1000 W dimmer	HQRD-10ND-
RadioRA® 2 adaptive dimmer	RRD-6NA-
RadioRA® 2 1000 W dimmer	RRD-10ND
myRoom™ DIN power module	MQSE-4A1-D
HomeWorks® QS DIN power module	LQSE-4A1-D
HomeWorks® QS wallbox power module	HQRJ-WPM-6D-120
HomeWorks® wallbox power module	HWI-WPM-6D-120
GRAFIK Eye® QS control unit	QSGR-, QSGRJ-
GRAFIK Eye® 3000 control unit	GRX-3100-GRX-3500-
RPM-4U module (LCP, HomeWorks® QS, GRAFIK Systems™, Quantum®)	HW-RPM-4U-120 LP-RPM-4U-120
RPM-4A module (LCP, HomeWorks® QS, GRAFIK Systems™, Quantum®)	HW-RPM-4A-120, LP-RPM-4A-120
GP dimming panels	Various
Ariadni CL 250W dimmer	AYCL-253P-
Diva CL 250W dimmer	DVCL-253P-DCSCCL-253P-
Nova T CL 250W dimmer	NTCL-250-
Power supply <b>LH1</b> Lutron Product Family	Part No.
PowPak Dimming Modules	RMJ-ECO32-DV-B
PowPak Dimming Modules	FCJ/FCJS-ECO
Energi Savr Nodes	QSN-1ECO-S
GRAFIK Eye QS control unit	QSN-2ECO-S
Homeworks QS control unit	QSGRJ- _E (wireless)
GRAFIK Eye QS control unit	QSGR- _E
Homeworks QS control unit	QSGR- _E
Quantum Hub	QP2-__ 2C
Quantum Hub	QP2-__ 4C
Quantum Hub	QP2-__ 6C
Quantum Hub	QP2-__ 8C
Homeworks QS power module	LQSE-2ECO-D
myRoom Plus power module	

### eldoLED DRIVER COMPATIBILITY

Power supply <b>EA2 / LA2</b> Dimmer / Switch Control Manufacturer	Family/Model #
Busch-Jaeger	2112U-101
Jung	240-10
Leviton Lighting Controls	IP710-DLX
Lightolier Controls	ZP600FAM120
Lutron Electronics	Nova T® - NTFTV
Lutron Electronics	Div@® - DVTV
Lutron Electronics	Nova@® - NFTV
Merten	5729
Pass & Seymour	CD4FB-W
The Watt Stopper	DCLV1
Sensor Switch	nI0 EZ
Synergy	ISD BC
Power supply <b>EA2 / LA2</b> Lighting Control Systems Manufacturer	Family/Model #
Lutron Electronics	GrafixEye® GRX-TVI w GRX3503
Lutron Electronics	Energy Savr Node™ - QSN-4T16-S
Lutron Electronics	TVM2 Module
Crestron®	GLX-DIMFLV8
Crestron®	GLXP-DIMFLV8
Crestron®	GLPAC-DIMFLV4-*
Crestron®	GLPAC-DIMFLV8-*
Crestron®	GLPP-DIMFLVEX-PM
Crestron®	GLPP-1DIMFLV2EX-PM
Crestron®	GLPP-1DIMFLV3EX-PM
Crestron®	DIN-A08
Crestron®	DIN-4DIMFLV4
Crestron®	CLS-EXP-DIMFLV
Crestron®	CLCI-1DIMFLV2EX
ABB	SD/S 2.16.1

